



30W SMDLED LOADING BAY FLOODLIGHT

MODEL NO: LED30WDL

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.




Refer to instructions

1. SAFETY

1.1. ELECTRICAL SAFETY

- WARNING!** It is the user's responsibility to check the following:
 - Check all electrical equipment and appliances to ensure that they are safe before using. Inspect power supply leads, plugs and all electrical connections for wear and damage. Sealey recommend that an RCD (Residual Current Device) is used with all electrical products. You may obtain an RCD by contacting your local Sealey dealer.
 - if the lamp is used in the course of business duties, it must be maintained in a safe condition and routinely PAT (Portable Appliance Test) tested.
 - ✓ Electrical safety information, it is important that the following information is read and understood.
 - ✓ Ensure that the insulation on all cables and on the appliance is safe before connecting it to the power supply.
 - ✓ regularly inspect power supply cables and plugs for wear or damage and check all connections to ensure that they are secure.
 - ✓ Ensure that the voltage rating on the appliance suits the power supply to be used and that the plug is fitted with the correct fuse.
 - ✗ **DO NOT** pull or carry the appliance by the power cable.
 - ✗ **DO NOT** pull the plug from the socket by the cable.
 - ✗ **DO NOT** use worn or damaged cables, plugs or connectors.
 - ✓ This product is fitted with a BS1363/A 13 Amp 3 pin plug. If the cable or plug is damaged during use, switch the electricity supply and remove from use. Repairs must be carried out by a qualified electrician. Replace a damaged plug with a BS1363/A 13 Amp 3 pin plug.
 - a) Connect the GREEN/YELLOW earth wire to the earth terminal 'E'.
 - b) Connect the BROWN live wire to the live terminal 'L'.
 - c) Connect the BLUE neutral wire to the neutral terminal 'N'.
- Ensure that the cable outer sheath extends inside the cable restraint and that the restraint is tight. Sealey recommend that repairs are carried out by a qualified electrician.

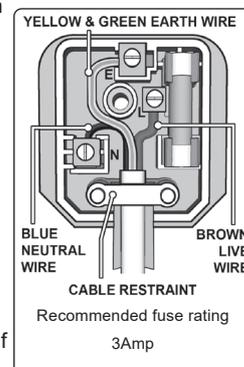

1.2. GENERAL SAFETY

- WARNING!** Turn off the mains power supply before servicing or performing any maintenance.
- ✓ Ensure the light is installed correctly in accordance with these instructions.
- ✓ If you use an extension lead **the cable must be fully unwound from the drum.**
- ▲ **DANGER! DO NOT** direct the light into a person's eyes. All models have a very intense light output which, if incorrectly used, could cause eye damage.
- ✗ **DO NOT** use the light without the front glass shield.
- ✗ **DO NOT** use the light near flammable, combustible or explosive liquids, solids, gases or equipment.
- ✓ Maintain the light in good condition. Repairs must only be undertaken by a qualified electrician (use an authorised service agent).
- ✓ Locate the light in an adequate area for its function, keep area clean and tidy and free from unrelated materials.
- ✓ When not in use, switch off the light and disconnect from the power supply.
- ✓ **DO NOT** install the light where it is likely to be knocked or hit.


2. INTRODUCTION

30W Loading Bay Floodlight. 4200 Lumen SMD LED Light on a 40" Foldable single arm bracket with 30 degree beam angle. Mains powered with a 1.5m cord length housed in cast aluminium. Light is encased in anti-corrosion stainless steel cage. Comes with integral AC-DC transformer.

3. SPECIFICATION

Colour Temperature:5000K
 Electrical Plug Type:3-Pin BS
 IP Rating:IP65
 LED Type:30 x SMD LED
 Lumen Output:4200 Lumens
 PIR Motion Sensor:no
 Power:30W

4. INSTALLATION

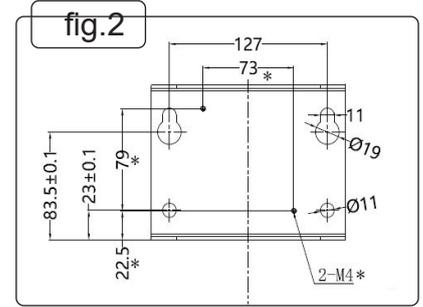

- ❑ **WARNING!** Mount floodlight on a flat and solid wall such as breeze block that is strong enough to securely hold the unit when fully extended.

- 4.1. The unit should be firmly secured to the wall in a suitable location using appropriate fixings.
- 4.2. Mark and pre-drill holes to suit hole pattern (fig.2) and fixings (fixings not supplied).

5. OPERATION

- 5.1. Connect the unit to the power supply and turn power on.
- 5.2. To turn unit on, press On/Off button on rear of light unit.
- 5.3. Adjust rotation and angle of lighting by loosening adjuster thumbwheels (fig.1) and moving light to the required position. Retighten when required lighting is achieved.

6. MAINTENANCE

- 6.1. Clean the casing externally (**not the glass**) with a moist cloth.
- × **DO NOT** use solvents or abrasives.
- 6.2. If necessary, clean the glass with alcohol and a soft cloth.

Parts support is available for this product. Please email sales@sealey.co.uk or telephone 01284 757500



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



WEEE REGULATIONS

Dispose of this product at the end of its working life in compliance with the EU Directive on Waste Electrical and Electronic Equipment (WEEE). When the product is no longer required, it must be disposed of in an environmentally protective way. Contact your local solid waste authority for recycling information.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.



Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR

☎ 01284 757500

📠 01284 703534

✉ sales@sealey.co.uk

🌐 www.sealey.co.uk