

# Guide to Installation - Garage Gym Flooring Kit

## PREPARATION

1. Clear the floor surface of any objects and items.
2. Thoroughly sweep or vacuum any excess dirt and debris off the floor surface and fill any defects with a concrete surface repair kit.
3. For best look to finished floor, paint a 4 inch border around bottom of garage walls and floor, using black paint before installing tiles.
4. For best results leave a 5mm gap between garage flooring and walls.
5. We also recommend leaving tiles 24hrs in the room before installing. Temperatures above 10°C and below 30°C are best for installing tiles.




- 1 Install ramp edges along front of garage, with garage door closed. (Remembering to cut corner pieces off from edges)

Ramp Edge




Cut corner pieces off from edges

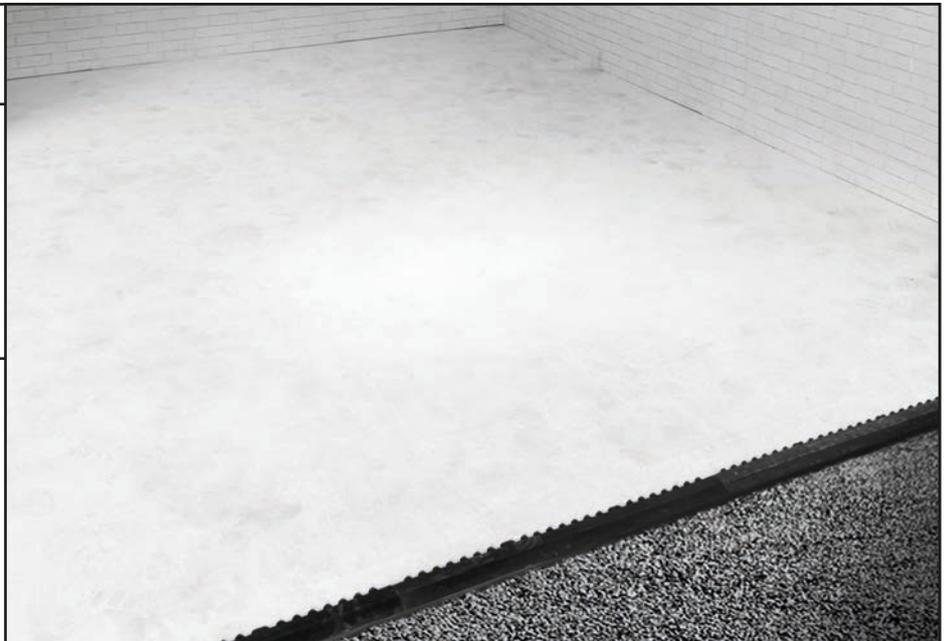

- 2 Keeping a uniform tile with the female edges on the bottom and right sides of tile start connecting 1 tile at a time to the edges, till the first row is completed.

### USEFUL TIP

Keep a uniform tile with female edges on the bottom and right side of tile

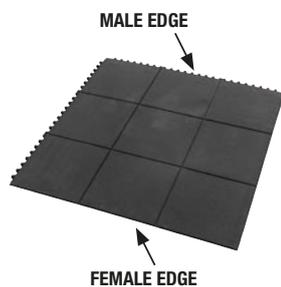


# Guide to Installation - Garage Gym Flooring Kit

**3** Now install a row of tiles going from the front to rear of garage.



**4** Open garage door and adjust tiles and edges if needed, for a flush even finish. Complete right side of garage working from the front to the rear.

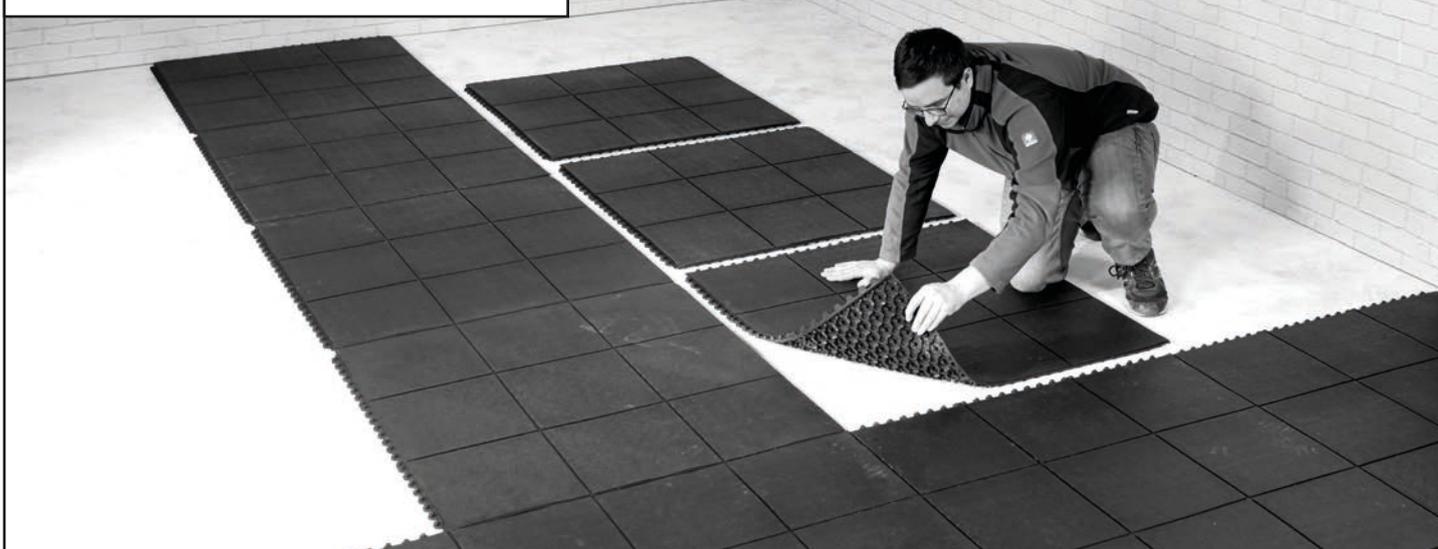

**5** Finish left hand side of garage. Depending on garage size and whether garage walls are at perfect right angles the tiles may need to be cut to fit. It's best to measure and cut tiles one at a time, remembering the 5mm gap between tile edge and wall.

