


Bubblemat Connect Anti Fatigue Mat

Interlocking tiles with high anti-fatigue properties



- Durable anti-fatigue matting system.
- Raised bubbled surface to stimulate blood circulation and reduction of fatigue.
- Interlocking system provides flexibility in the type of shape that can be created.
- Soft but sturdy rubber material offers protection from adverse effects from cold, hard concrete floors.
- Rubber is naturally slip resistant.

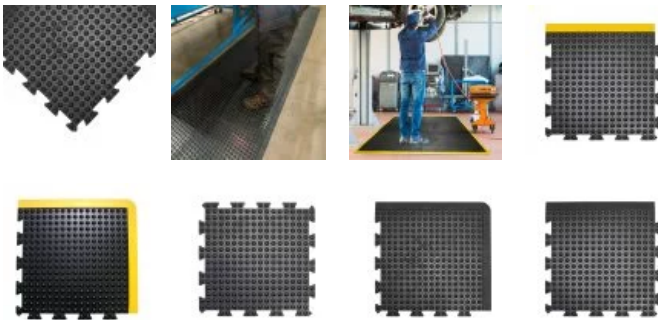

Parts

Part Number	Size	Colour	Weight
BF010007	50 cm x 50 cm (Middle)	Black	2.05 kg
BF010008	50 cm x 50 cm (End)	Black	2.05 kg
BF010009	50 cm x 50 cm (Corner)	Black	2.05 kg
BF010708	50 cm x 50 cm (End)	Black/Yellow	2.05 kg
BF010709	50 cm x 50 cm (Corner)	Black/Yellow	2.05 kg

Technical Specification

Material	Natural rubber
Surface Finish	Bubble
Product Height	13.5 mm
Product Weight	5.75kg
Operating Temperature	-30°C to +50°C
Resistance to Chemicals	Not resistant to fat and mineral oil
Environmental Resistance	Suitable for dry indoor environments
UV Resistance	Yes
Installation Method	Loose lay interlocking mats
Cleaning Method	Use a high pressure hose (not exceeding 60psi) to remove the dirt and debris on the mats. For best

results use a mild detergent (pH 4.0-9.0) to clean the mats. Do not use steam or degreasers or caustic chemicals. Do not mechanically scrub the mats.

Country of Origin	Sri Lanka
Tensile Strength	3 MPa
250%	Manufacturing process
Compression moulding	