




Gripfoot

Improve grip on smooth surfaces with an abrasive grit finish

- Self-adhesive tapes, cleats or tiles with an abrasive grip surface which helps to improve anti-slip properties.
- A hardwearing and easy to install solution to help prevent slips and trips.
- Available in a range of colours, including a hazard version which provides high visibility in darkness and low light conditions.
- Gripfoot Tape versatile for floor surfaces, machinery and vehicles.
- Gripfoot Cleats (rectangular) are designed for use on steps and stairs.
- Gripfoot Tiles (square) are ideal for increasing safety on smooth, tiled floors.
- Slip tested to DIN 51130.

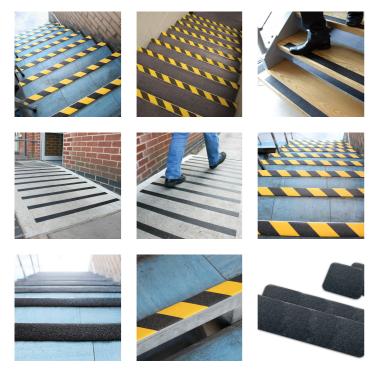





Parts

Part Number	Size	Colour	Weight (kg)
GF010001	25 mm x 18.3 m	Black	0.4
GF010002	50 mm x 18.3 m	Black	0.8
GF010003	102 mm x 18.3 m	Black	1.45
GF010004	152 mm x 18.3 m	Black	2.5
GF010005	140 mm x 140 mm	Black	
GF010006	152 mm x 610 mm	Black	
GF010702	50 mm x 18.3 m	Black/Yellow	0.8
GF020002	50 mm x 18.3 m	Blue	0.8
GF030002	50 mm x 18.3 m	Red	0.8
GF031002	50 mm x 18.3	Red/White	0.8
GF040002	50 mm x 18.3 m	Green	0.8
GF070002	50 mm x 18.3	Yellow	0.8
GF110002	50 mm x 18.3 m	Luminous	0.8

Technical Specifications

Mat	terial	Abrasive grit consisting of aluminium oxide bonded to a polymer substrate. Solvent based acrylic emulsion adhesive backing. Product supplied with a moisture resistant release liner.
Sur	face Finish	Grit
Pro Heig	duct ght	1.05 mm
	erating operature	-10°c
	c. erating nperature	+60°c
	ironmental sistance	Suitable for indoor environments
UV Res	istance	Yes
Typi App	ical olications	Stairs, Ladders, Ramps, Walkways, Vehicles

Part Number	Size	Colour	Weight (kg)
GF120002	50 mm x 18.3 m	Clear	1.45

Installation Method	Self-adhesive tape applied with pressure
COO (Country of Origin)	TW
Adhesion Strength	1.6 kg / 25 mm
Coating Thickness	0.05 mm
Solvent Residue	0.50%
Release Force	30g / 25 mm
Slip Tested to	DIN 51130 - R13

Additional Information



Gripfoot Ramp Slip Test DIN 51130

www.cobaeurope.com