


Premier Surface

Entrance tiles designed to be laid directly to the floor surface



Easy
Install™


- No matwell required, interlocking entrance tiles can be laid to surface.
- Solid surface tiles effectively capture dirt to protect interior floors.
- Hardwearing nylon carpet inserts scrape dirt and wipe moisture.
- PVC base tile is manufactured from 100% recycled materials.
- Suitable for high volume footfall in commercial locations.
- Optional 'impact-resistant' bevelled edges and corners and T-pieces withstand heavy shopping trolleys.
- Co-ordinating Alba carpet can also be supplied in rolls for primary and secondary dirt barrier use.
- Fire tested to BS EN 13501-1 and slip tested to BS 7976-2.

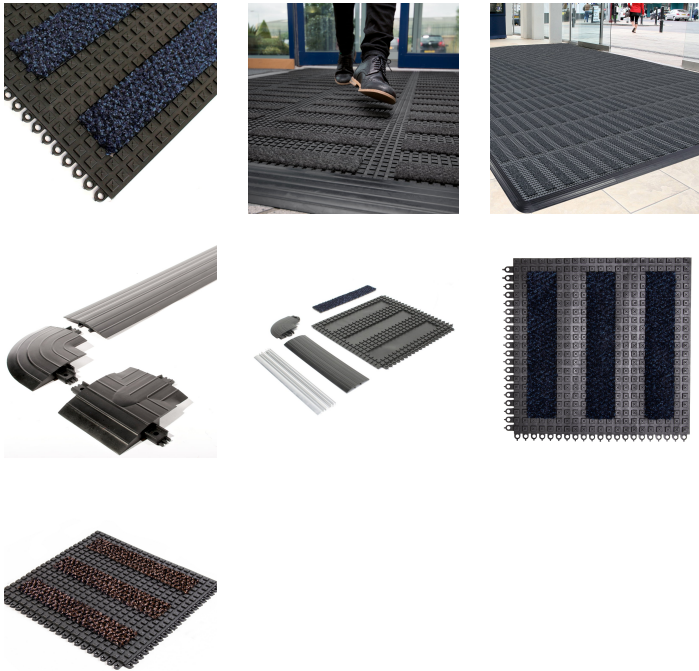


Styles Available




Brown



Grey



Blue

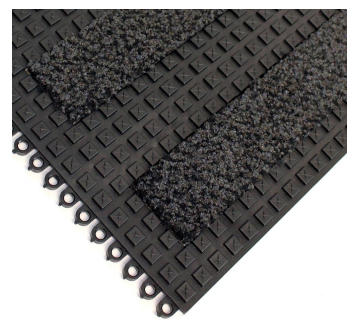

Anthracite

Parts


Part Number	Size	Colour	Weight (kg)
PSC00004	100 mm x 100 mm	Black	0.05
PSC010101	30 cm x 30 cm	Anthracite	0.6
PSC010201	30 cm x 30 cm	Blue	0.6
PSC010501	30 cm x 30 cm	Brown	0.6
PSC010601	30 cm x 30 cm	Grey	0.6
PSE00002	78 mm x 2.0 m	Black	

Technical Specifications

Material	ECONYL® Regenerated Nylon in PVC tile
Product Height	12 mm
Typical Applications	Entrance areas
Installation Method	Laid to surface - fixed with screws
COO (Country of Origin)	UK
Guarantee	5 years
Notes	Alba is a tufted carpet product and therefore its appearance can vary depending on the direction of the pile and the light in the surrounding environment. To achieve a uniform appearance consider hoovering the product in a single direction.
Slip Tested to	BS 7976-2 - low slip potential

Additional Information

 Installation Guide

 Premier Surface - BS 7676-2 Pendulum Slip Test