


Shotblast Rubber

Cost-effective, abrasion-resistant rubber sheeting

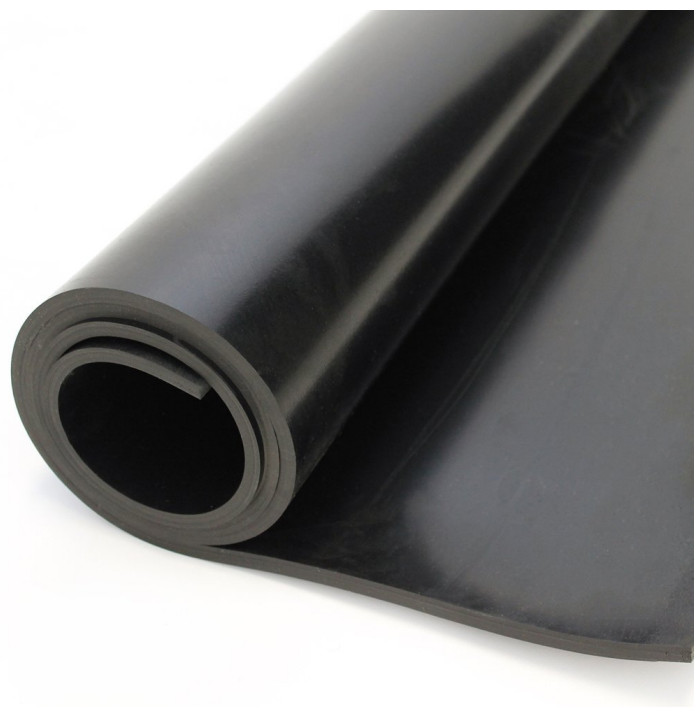

- Smooth surfaced, economical sheeting with high tensile strength.
- Ideal for shot-blast cabinet lining, chute lining, skirting rubber, seals and scrapers.
- 62 degrees shore A hardness.
- Tensile strength at break: 10.0 Mpa.
- Elongation at break: 350%.

Parts

Part Number	Size	Colour	Weight (kg)
SRS00001	1.4 m x 10 m x 3 mm	Black	61
SRS00002	1.4 m x 10 m x 4.5 mm	Black	112
SRS00003	1.4 m x 10 m x 6 mm	Black	104
SRS00004	1.4 m x 10 m x 12 mm	Black	112

Technical Specifications

Material	Natural rubber and SBR
Surface Finish	Smooth
Product Height	1 mm-25 mm
Roll Length	5 m, 10 m
Min. Operating Temperature	-30°C
Max. Operating Temperature	+80°C
Other Product Performance Information	Test Temperature 25°C Relative Humidity 35% Test by GB5574-94 Correlation criterion GB/T528-1998 GB/T3512-1989 GB/T531-1992
COO (Country of Origin)	CN

