

LOW PROFILE STATIC SCISSOR TABLE

- 1000kg capacity
- Standard or U shaped design (Euro Pallet) for loading with a pallet truck)



TECHNICAL FEATURES

- 3 Phase mains powered tables
- These tables achieve a low closed height, eliminating the need for pit installation
- All tables are manufactured to European standard – EN1570:2011
- Remote power pack mounted on pedestal, protected to IP 54
- Suitable for light, infrequent use
- Upper platform fitted with safety trip bar to prevent decent on detection of obstruction
- Check valve included for slow, controlled lowering in the event of a burst hose. The safety trip bar will still prevent the table from dropping altogether if it is still powered.
- Removable lifting eyes to facilitate handling installation and inspection


TECHNICAL SPECIFICATION

“U” Shape low profile table (585mm gap for pallet truck access)


	CAPACITY	A RAISED HEIGHT	B CLOSED HEIGHT	C PLATFORM WIDTH	D PLATFORM LENGTH	LIFTING TIME	POWER PACK	NET WEIGHT
AH35A13	1000KG	860mm	85mm	1140mm	1450mm	18 sec	AC 0.75	280KG

Standard low profile table (these tables are supplied with loading ramps 900mm long, 1140mm wide - against the short side)

	CAPACITY	A RAISED HEIGHT	B CLOSED HEIGHT	C PLATFORM WIDTH	D PLATFORM LENGTH	LIFTING TIME	POWER PACK	NET WEIGHT
AH34A13	1000KG	860mm	85mm	1140mm	1450mm	18 sec	AC 0.75	280KG

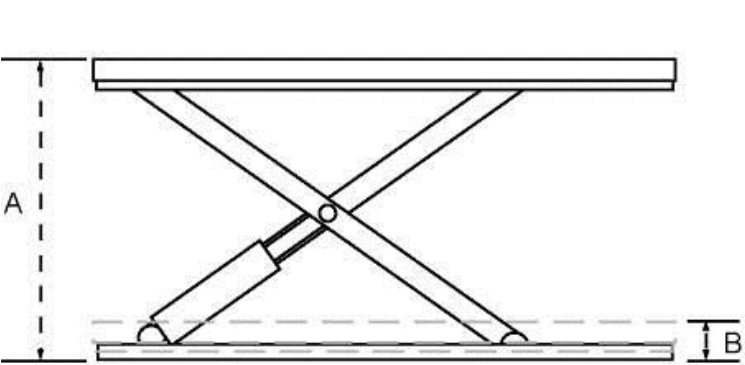

side elevation

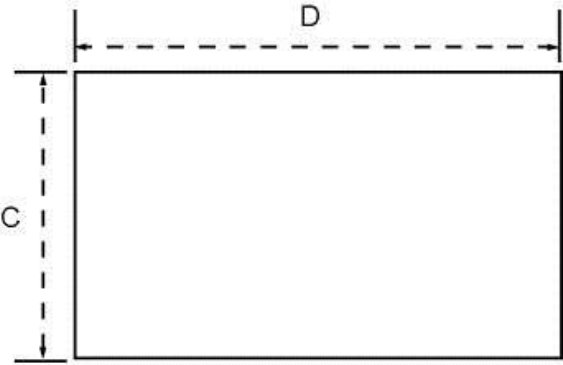

platform specification

