


Assembly Sheet

BiG340 GARMENT RACKING



COMPONENTS CHECK LIST:

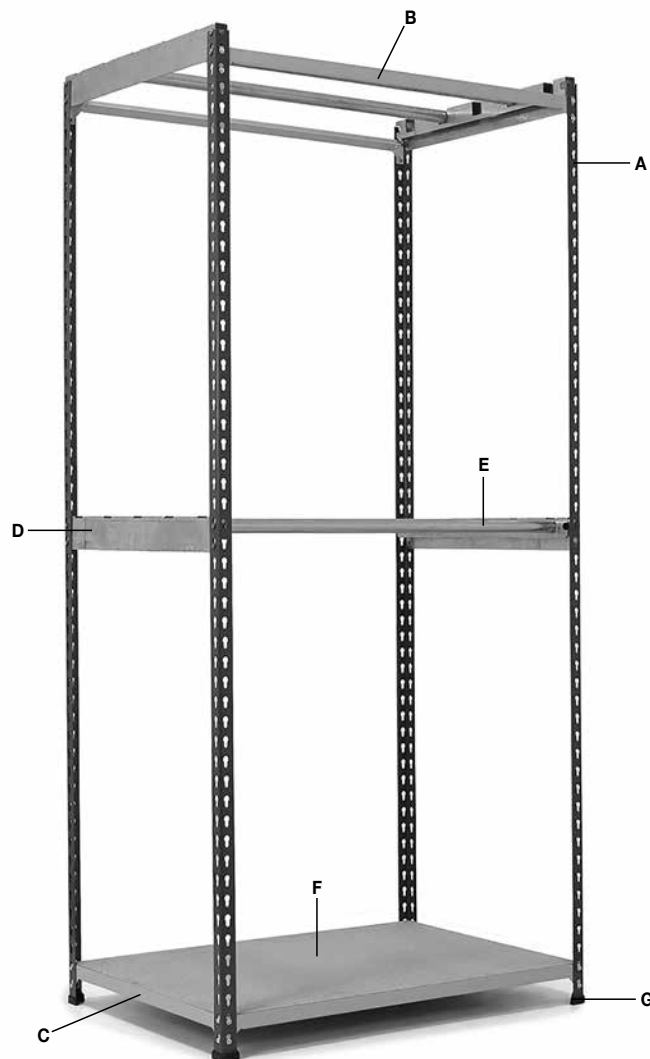

(A)
UPRIGHT
Quantity: 4



(B)
FRONT & BACK BEAM
Quantity:
1980h x4, 2440h x6, 3048h x6



(C)
SIDE BEAM
Quantity: 2 per shelf level



(D)
GARMENT RAIL SUPPORT BEAM
Quantity: 2 level bay



(E)
GARMENT RAIL
Quantity: 2 level



(F)
CHIPBOARD DECK
Quantity: 1










(G)
PLASTIC FOOT
Quantity: 4








(H)
BEAM TIES
(only supplied with 1525mm W bays)
Quantity: 1 per shelf level

If you have any missing components please take note of the part name and contact your supplier.

Shelving is safe when used responsibly. If in doubt, contact the supplier.

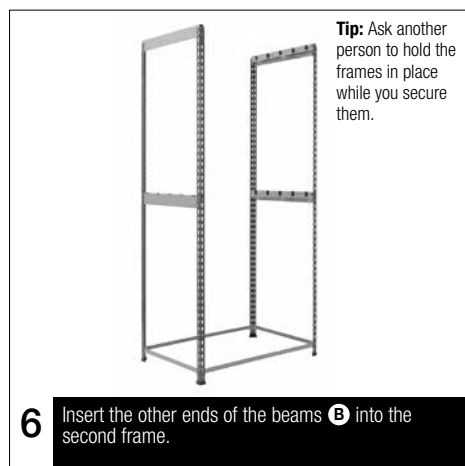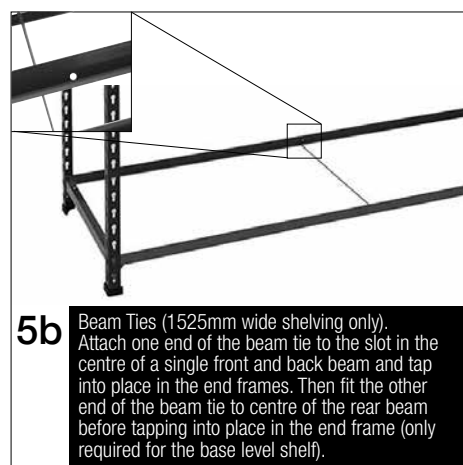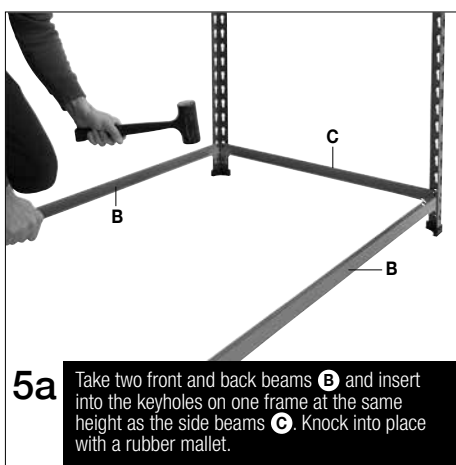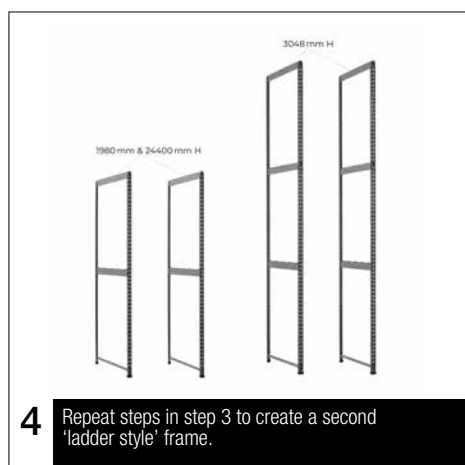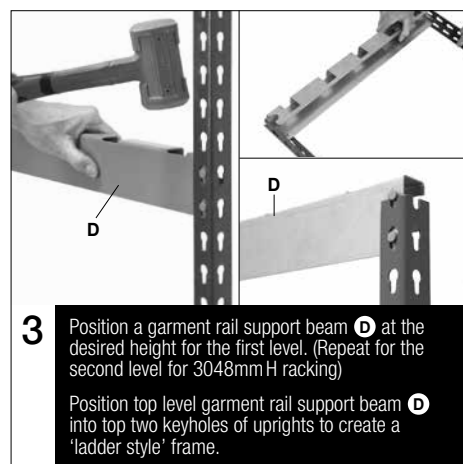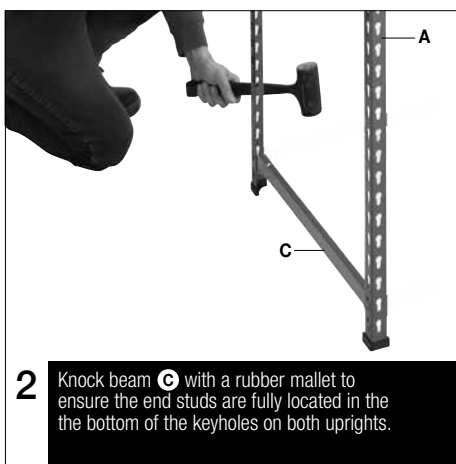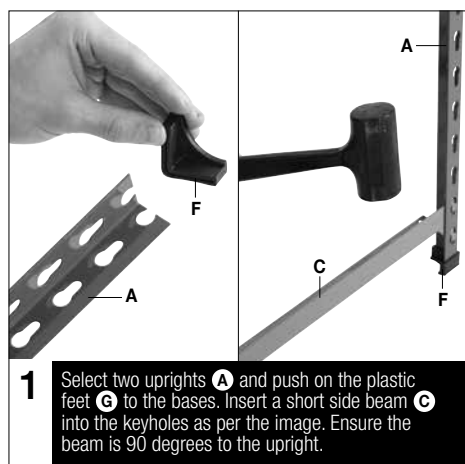

Tip: Ask another person to hold the frames in place while you secure them.

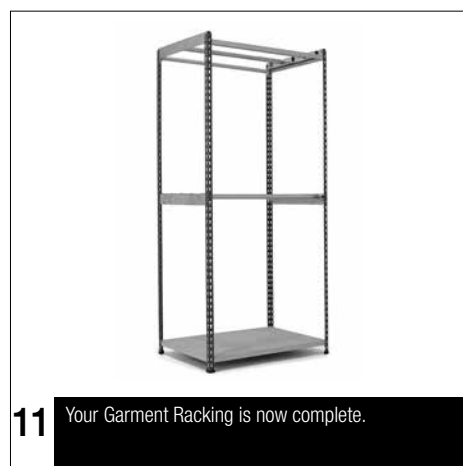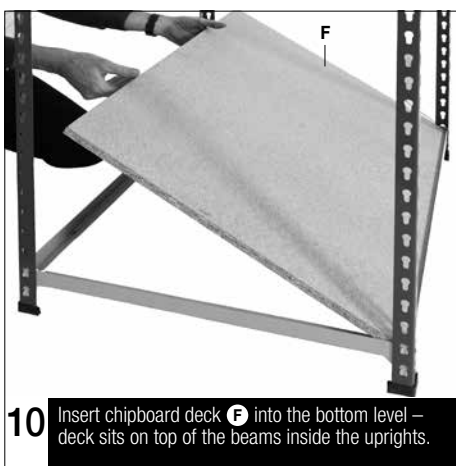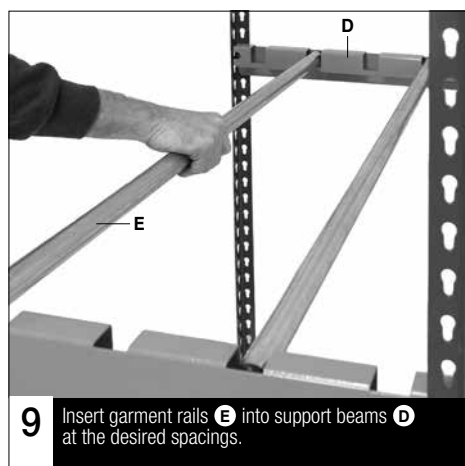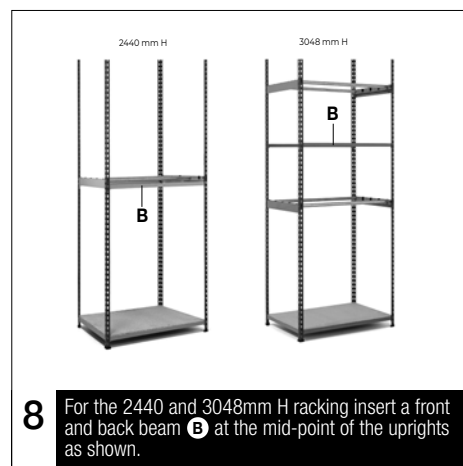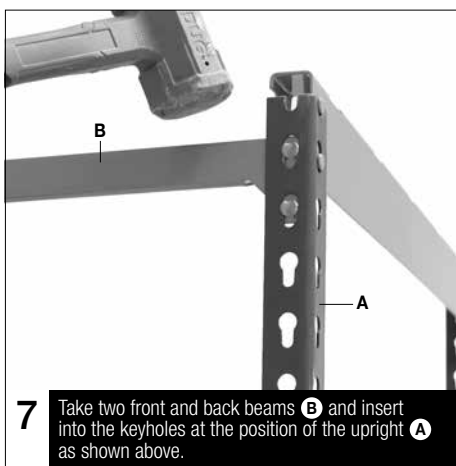

Assembly Sheet

BiG340 GARMENT RACKING

These load charts relate to shelving with the following specification:

- Maximum post height = 3048mm
- Similar distances (height) between levels
- Bays are positioned on a level floor

For any other layouts, please refer to your supplier for detailed loading capacities.

Shelf Load Capacities

Maximum permitted shelf capacities are based on UDL[†]. Please note that bay capacity may limit the maximum load per shelf:

**IF YOU ARE IN ANY DOUBT
REGARDING LOAD CAPACITIES, PLEASE CONTACT YOUR SUPPLIER**

UDL[†] = Uniformly Distributed Load

BiG340 Garment Racking Assembly		
Shelf Width mm	Load Capacity Per Rail	Load Capacity Per shelf
915 mm	85 kg	160 kg
1220 mm	45 kg	90 kg
1525 mm	25 kg	50 kg
Maximum Load Per Bay		
Up to 1980 mm H	Up to 330 kg UDL [†] Per Bay	
Up to 2440 mm H	Up to 330 kg UDL [†] Per Bay	
Up to 3048 mm H	Up to 415 kg UDL [†] Per Bay	

Safety Instructions



Information

If in doubt, contact the supplier:

- Read this guide before commencing assembly and retain for future reference
- Before commencing assembly, unpack carefully and check that all components ordered are included
- Assembly should be undertaken by a minimum of two competent people
- Assess for floor fixing. Tall narrow bays may require this to ensure stability
- Tools – Rubber mallet, tape measure and drill if wall fixing is required



Caution

During assembly, ensure to:

- Take care during assembly and in use, particularly when lifting or stretching and when using tools
- Wear appropriate safety clothing – protective gloves and footwear are recommended
- Build on a suitable level floor, which is strong enough to support the load
- Dispose of packaging materials responsibly



Warning

Rules for the safe use of shelving:

- Ensure these instructions are retained for reference and that users are aware of the rules for safe use
- Never climb on the structure or stand on the shelves
- Do not lean or support ladders, steps, or other objects against shelvings
- Always use safety steps to reach high shelves
- Do not use in damp or wet conditions
- Load heavy items on the lower shelves and lighter items on the higher shelves
- This product is designed for hand loading only
- Ensure that the maximum load carrying capacities are not exceeded
- Refer online to loading chart for details