

Assembly Sheet

BiGDUG ESSENTIALS MANUAL SCISSOR LIFT TABLE



COMPONENTS CHECK LIST:



(A)

**SCISSOR LIFT
TABLE/HANDLE**
Quantity: 1




(B)


FOOT PEDAL
Quantity: 1

If you have any missing components please take note of the part name and contact your supplier.

Lift tables are safe when used responsibly. If in doubt, contact the supplier.

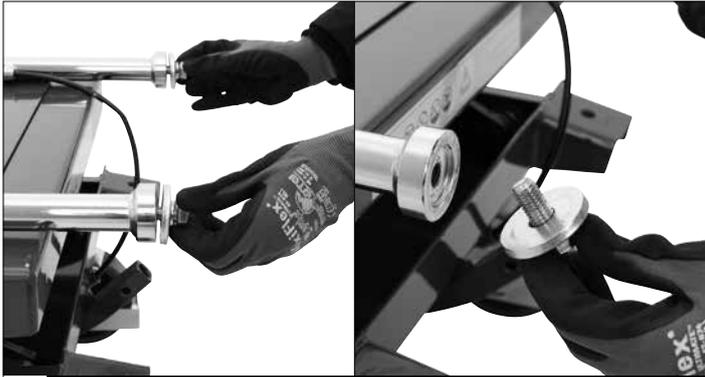

1 Remove the bolts from the bottom of the handle.
(For the 150kg capacity lift table, just simply fold the handle up).

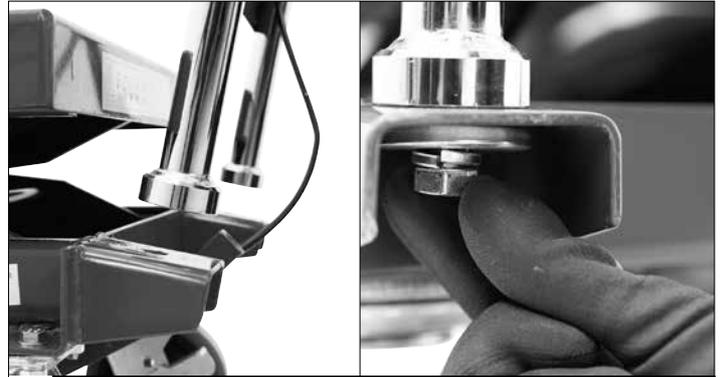


2 Place the handle over the mounting holes and secure by fitting the bolts, spring washers and flat washers on both sides.




3 Tighten using a 18mm spanner.



4 Insert the foot pedal **B** into the square bar with the pedal pointing to the right.

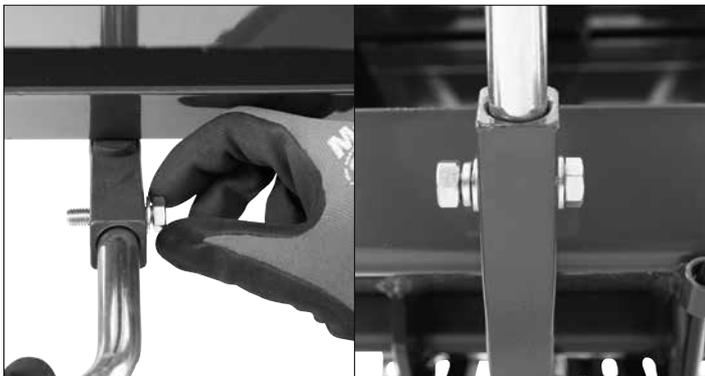

5 Secure by fitting the bolt and flat washer on one side, and the nut, spring washer and second flat washer on the other side.

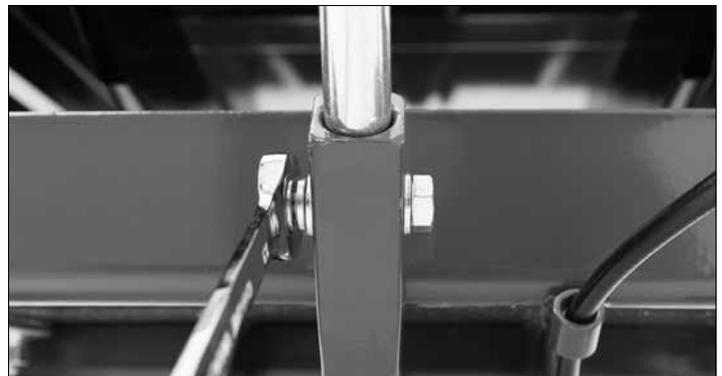

6 Tighten using a 13mm spanner.

Safety Instructions



Information:

If in doubt, contact the supplier:

- Read this guide before commencing assembly and retain for future reference
- Before commencing assembly, unpack carefully and check that all components ordered are included
- Assembly should be undertaken by a minimum of two competent people
- Tools – 13mm and 18mm spanner



Caution:

During assembly, ensure to:

- Read this guide before commencing assembly and retain for future reference
- Take care during assembly and in use, particularly when lifting or stretching and when using tools
- Wear appropriate safety clothing – protective gloves and footwear are recommended
- Build on a suitable level floor, which is strong enough to support the load and allow adequate working space
- Dispose of packaging materials responsibly



Warning:

Rules for the safe use of shelving:

- Ensure these instructions are retained for reference and that users are aware of the rules for safe use
- Do not overload the lift table. The load capacity and lifting height should be within the maximum limit
- Do not put feet or hands in the scissor lifting mechanism
- Do not sit or stand on the table
- Brake the truck when loading
- Do not side or end load. Load must be distributed on at least 80% of table area
- Do not handle unstable or loosely stacked loads. Use special care when handling long, high or wide loads
- Do not leave the cargo on the table for a long time
- Do not move the lift table when it is in a raised position
- Do not use the lift table on a slope or inclined surface. It is designed to be used on even and level floors
- Do not drag the cargo on the table whilst raised, as this may cause it to turn over
- Do not climb under the lift table