

Assembly Sheet

PICKING LEVEL FOR USE WITH BIGDUG PALLET RACKING



COMPONENTS CHECK LIST:



(A)
SHELF BEAM
Quantity:
2 per level



(B)
BEAM SAFETY CLIP
Quantity:
4 per level



(C)
STEEL DECK SUPPORTS
Quantity:
2 per level for 1850 mm wide bays
4 per level for 2225, 2700 & 3300 mm wide bays




(D)
CHIPBOARD DECK
Quantity:
1 per level for 1850 mm wide bays
2 per level for 2225, 2700 & 3300 mm wide




(E)
CHIPBOARD CLAMP
Quantity:
4 per Chipboard Deck

If you have any missing components please take note of the part name and contact your supplier.


Pallet Racking is safe when used responsibly. If in doubt, contact the supplier.

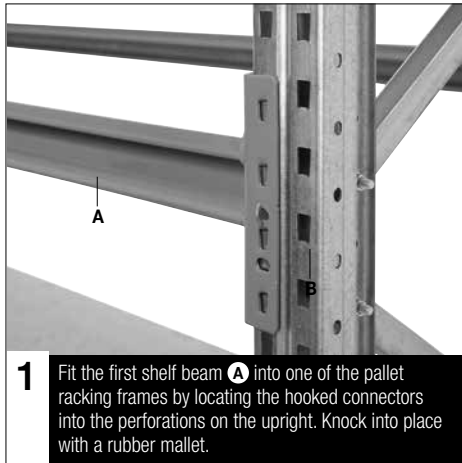

1 Fit the first shelf beam **A** into one of the pallet racking frames by locating the hooked connectors into the perforations on the upright. Knock into place with a rubber mallet.

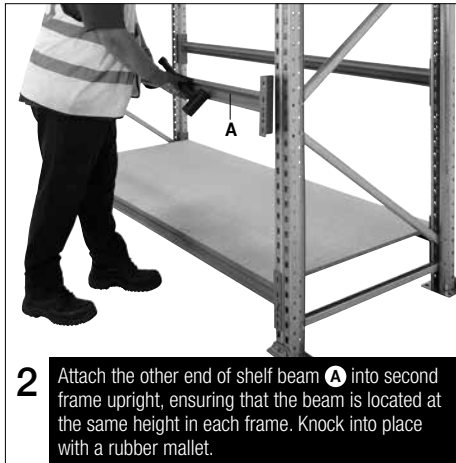

2 Attach the other end of shelf beam **A** into second frame upright, ensuring that the beam is located at the same height in each frame. Knock into place with a rubber mallet.

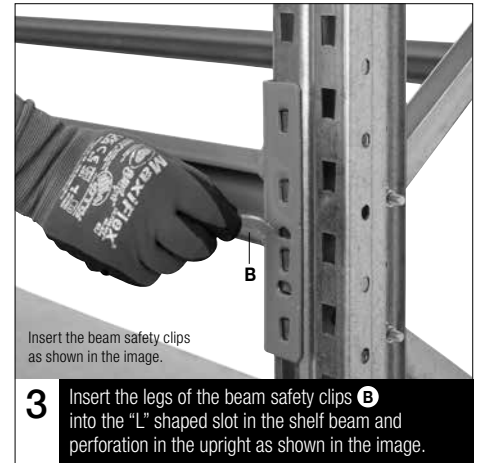


Insert the beam safety clips as shown in the image.


3 Insert the legs of the beam safety clips **B** into the "L" shaped slot in the shelf beam and perforation in the upright as shown in the image.




4 Tap into place with a mallet if required. This will prevent the beams from being removed from the uprights.

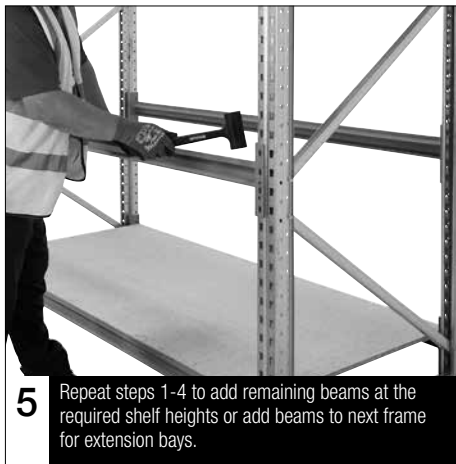

5 Repeat steps 1-4 to add remaining beams at the required shelf heights or add beams to next frame for extension bays.

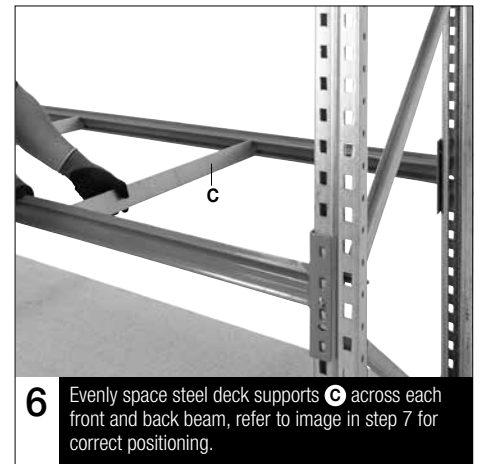


6 Evenly space steel deck supports **C** across each front and back beam, refer to image in step 7 for correct positioning.

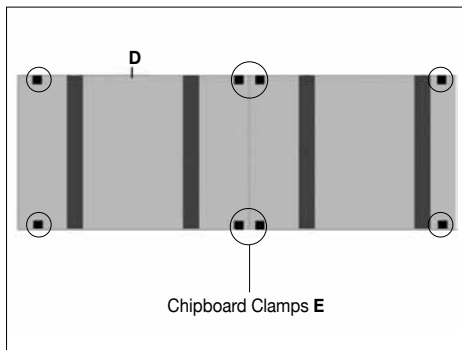


Chipboard Clamps **E**

7 Chipboard boards **D** 2225mm or over will come in two pieces per level and chipboard clamps **E** must be fitted 50mm from the edge of each piece as per the image above.

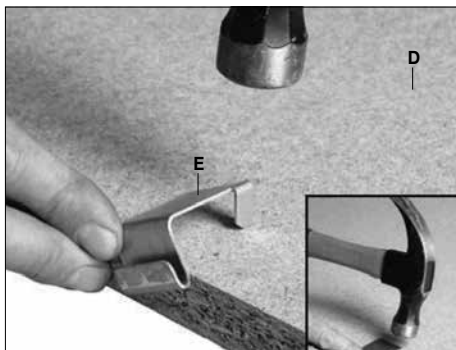

8 To install the chipboard clamps **E**, use a hammer to tap the point of the clamp into the chipboard **D** until secure, repeat across all required chipboard boards.

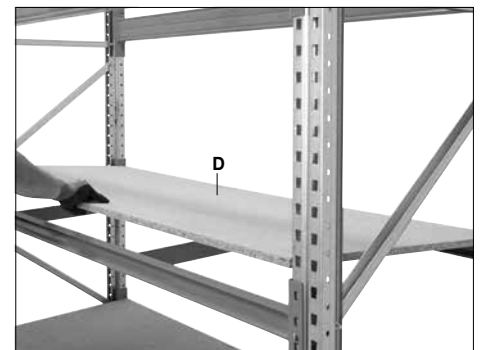

9 Insert chipboard decks **D** into shelf beams **A** ensuring they sit onto the top ledges, and that the clamps **E** hook over the edges as below.

Safety Instructions**Information:**

If in doubt, contact the supplier:

- Read this guide before commencing assembly and retain for future reference
- Before commencing assembly, unpack carefully and check that all components ordered are included
- Assembly should be undertaken by a minimum of two competent people
- Tools – 19mm socket
- Floor fixing is required to ensure stability. If this is not possible, we recommend products over 2000mm high are fixed to the wall where possible

**Caution:**

During assembly, ensure to:

- Take care during assembly and in use, particularly when lifting or stretching and when using tools
- Wear appropriate safety clothing – protective gloves and footwear are recommended
- Build on a suitable level floor, which is strong enough to support the load and allow adequate working space
- Dispose of packaging materials responsibly

**Warning:**

Rules for the safe use of shelving:

- Ensure these instructions are retained for reference and that users are aware of the rules for safe use
- Never climb on the structure or stand on the shelves
- Do not lean or support ladders, steps, or other objects against shelving
- Always use safety steps to reach high shelves
- Do not use in damp or wet conditions
- Load heavy items on the lower shelves and lighter items on the higher shelves
- Ensure that the maximum load carrying capacities are not exceeded
- Please refer to the loading information supplied for details
- This product is designed for hand loading only