


TWIN SLOT - WALL MOUNTED SHELVING



COMPONENTS CHECK LIST:

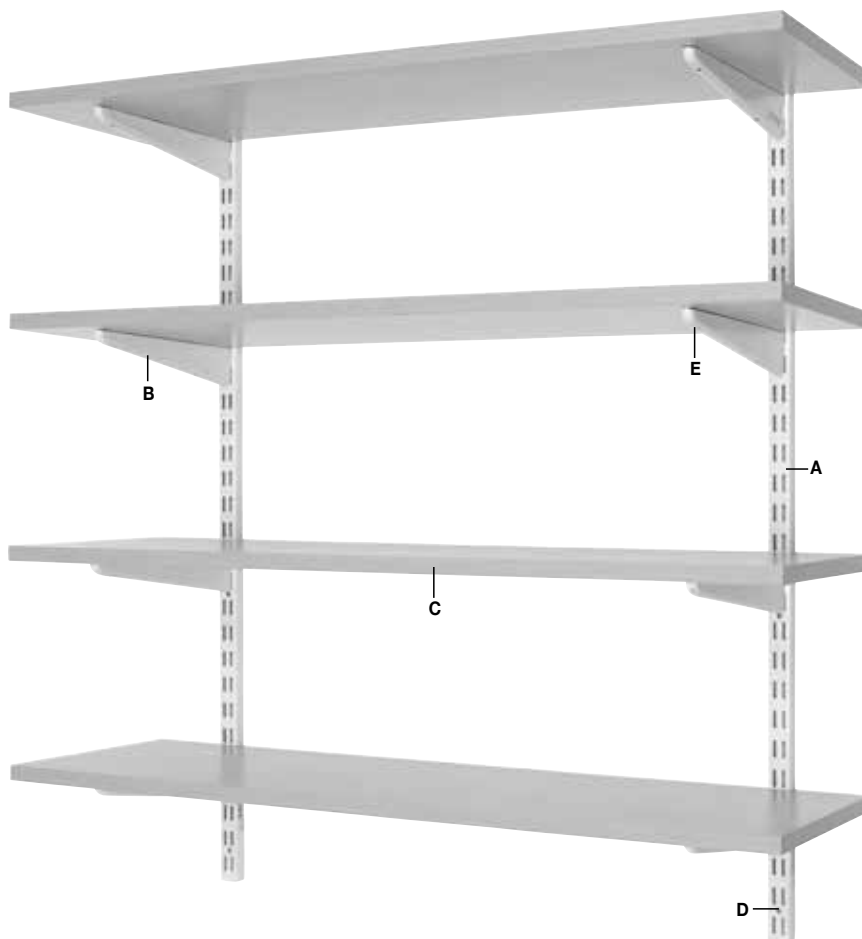

(A)

SLOTTED STEEL UPRIGHTS
Quantity: 2



(B)

BRACKETS
Quantity: 2 Per Shelf



(C)

SHELVES
Quantity:
Dependant on Kit Choice



(D)

UPRIGHT FIXINGS PACK
Quantity: 1 Pack
(includes: 10x3" No.10's & 10 Plugs)



(E)

SHELF FIXING PACK
Quantity: 1 Pack
(includes: 10x1" No 8's & 10x2" No 8's)

If you have any missing components please take note of the part name and contact your supplier.

Wall Mounted Shelving is safe when used responsibly. If in doubt, contact the supplier.

Before commencing ensure you have the tools required, a spirit level, screwdriver and power drill. Ensure the wall type is appropriate and strong enough to mount the shelving and that fitting won't interfere with any pipework or electrical wires.

1

2

Position the first upright **A** on the wall and use your spirit level to mark a vertical line next to the upright and mark the first fixing point.

3

Drill a pilot hole on the marked fixing point, use an appropriate wall plug and screw **D** the first upright **A** into the wall.

4

Hold the next upright **A** in place and use the spirit level to ensure it is precisely vertical and mark this line.

5

Use the spirit level across the top of the two uprights **A** once they are level, mark the first fixing point and repeat step 2.

6

Mark all other fixing points, drill and plug these holes. Use the appropriate screws **D** and fix the upright to the wall through every available fixing point.

7

Choose where you would like your shelves **C** and simply hook to drop and lock the bracket **B** in place.


8

Check that all brackets **B** are level and centrally position the shelf **C** (see step 10 for shelf spacing).

9

Insert and screw **E** through the shelf brackets **B** and into the shelf **C**; you may need to create pilot holes on the bottom of the shelves. Repeat for all shelves.

Space each shelf according to requirements.

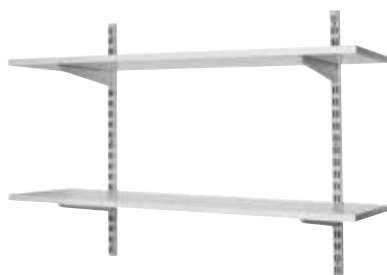

Maximum bracket load 50kg (all sizes)

10 **SAFETY FEATURE:** Drop-and-lock bracket design prevents the bracket from accidentally being dislodged during use.




Fixing Details

TWIN SLOT - WALL MOUNTED SHELVING

Fixing Details For All Twin Slot Uprights

First fixing centre 38mm from each end · all holes 7mm countersunk · black rings = fixing hole centres · all dimensions in mm.

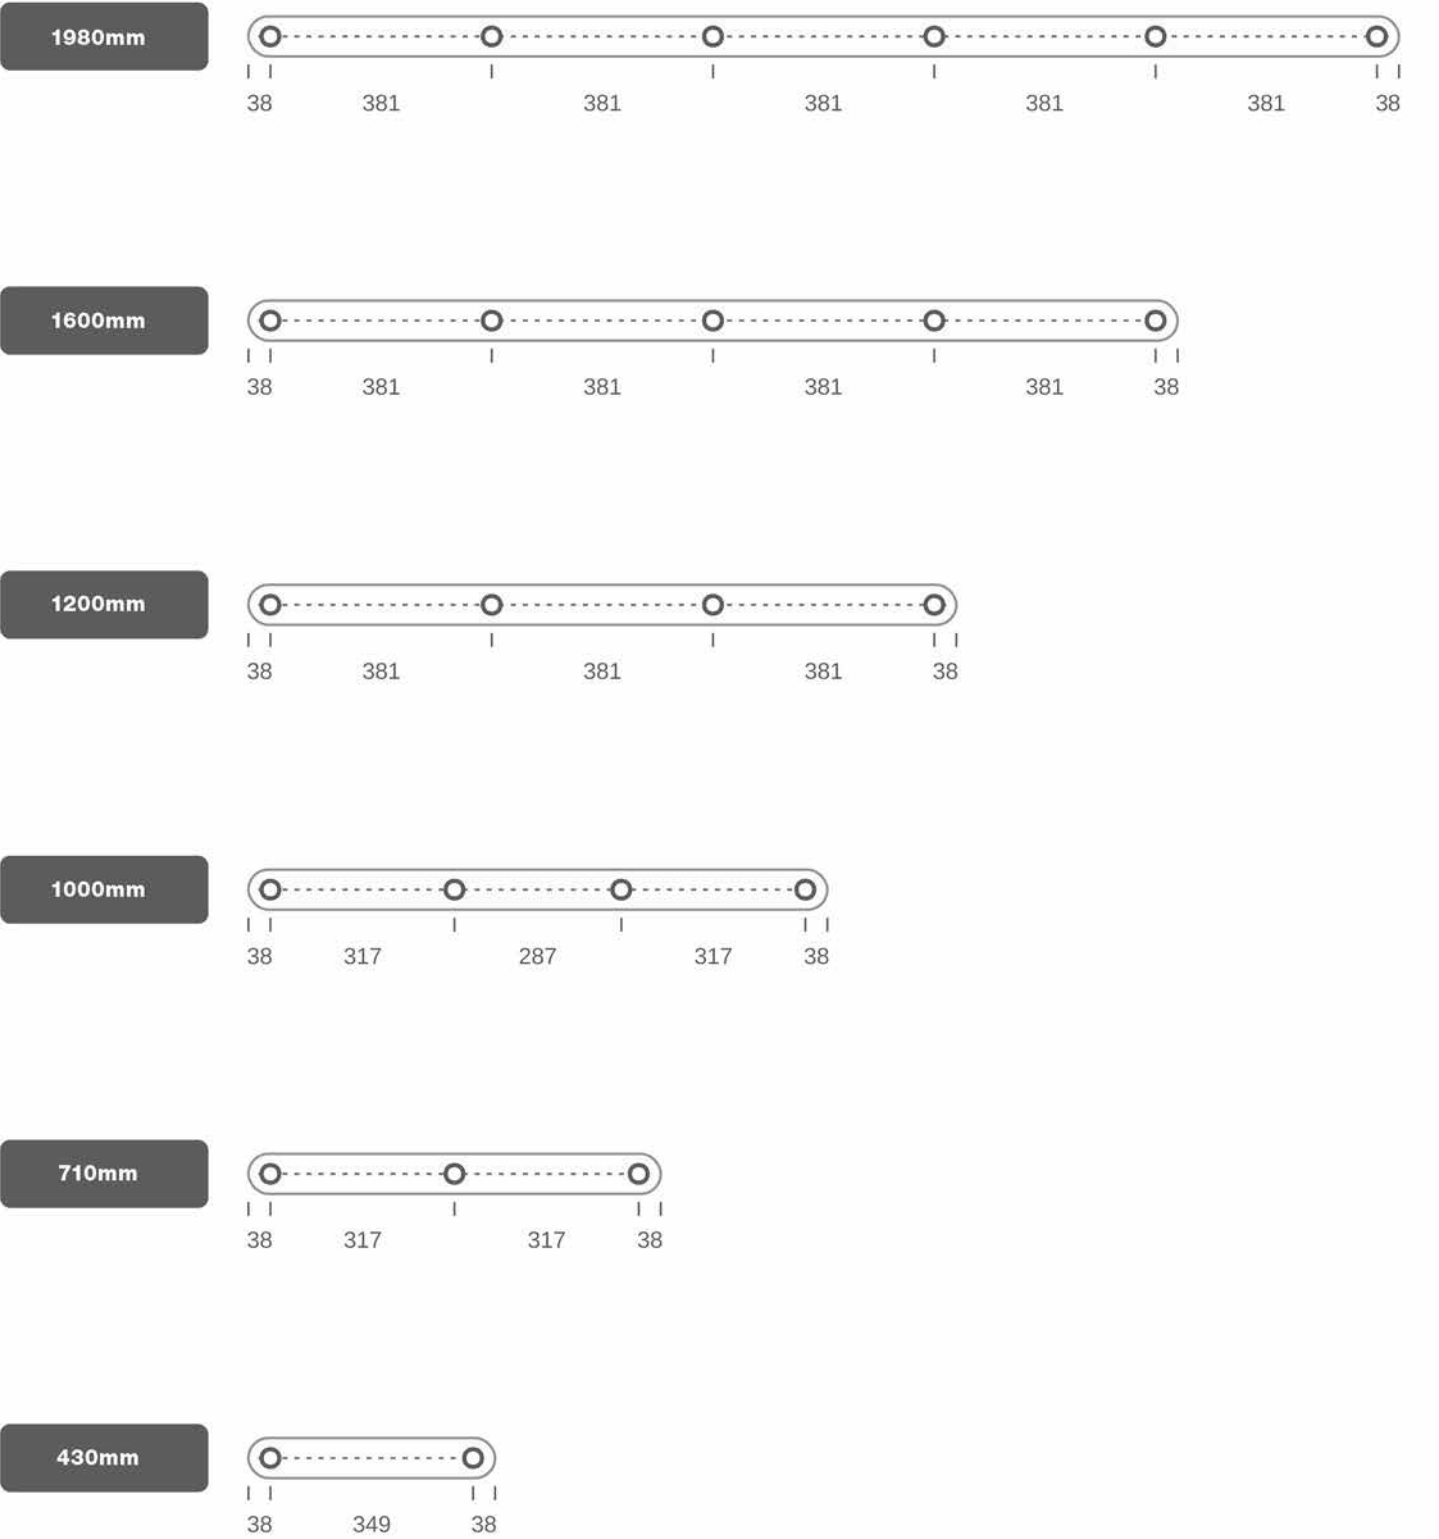

Note: Illustrations not to scale

Safety Instructions



Information:

If in doubt, contact the supplier:

- Read this guide before commencing assembly and retain for future reference
- Before commencing assembly, unpack carefully and check that all components ordered are included
- Assembly should be undertaken by a minimum of two competent people
- Tools – Spirit level, screwdriver and a power drill is required



Caution:

During assembly, ensure to:

- Take care during assembly and in use, particularly when lifting or stretching and when using tools
- Wear appropriate safety clothing – protective gloves and footwear are recommended
- Dispose of packaging materials responsibly



Warning:

Rules for the safe use of shelving:

- Ensure these instructions are retained for reference and that users are aware of the rules for safe use
- Never climb on the structure or stand on the shelving/workstation/workbench
- Do not lean or support ladders, steps, or other objects against shelving/workstation/workbench
- Always use safety steps to reach high shelves
- Do not use in damp or wet conditions
- Load heavy items on the lower shelves and lighter items on the higher shelves
- Ensure that the maximum load carrying capacities are not exceeded
- This product is designed for hand loading
- Please refer to the loading information supplied for details