




Parts Information:
**Power Inverter Pure Sine Wave 300W 12V
 DC - 230V 50Hz
 Model No: PSI300.V2**

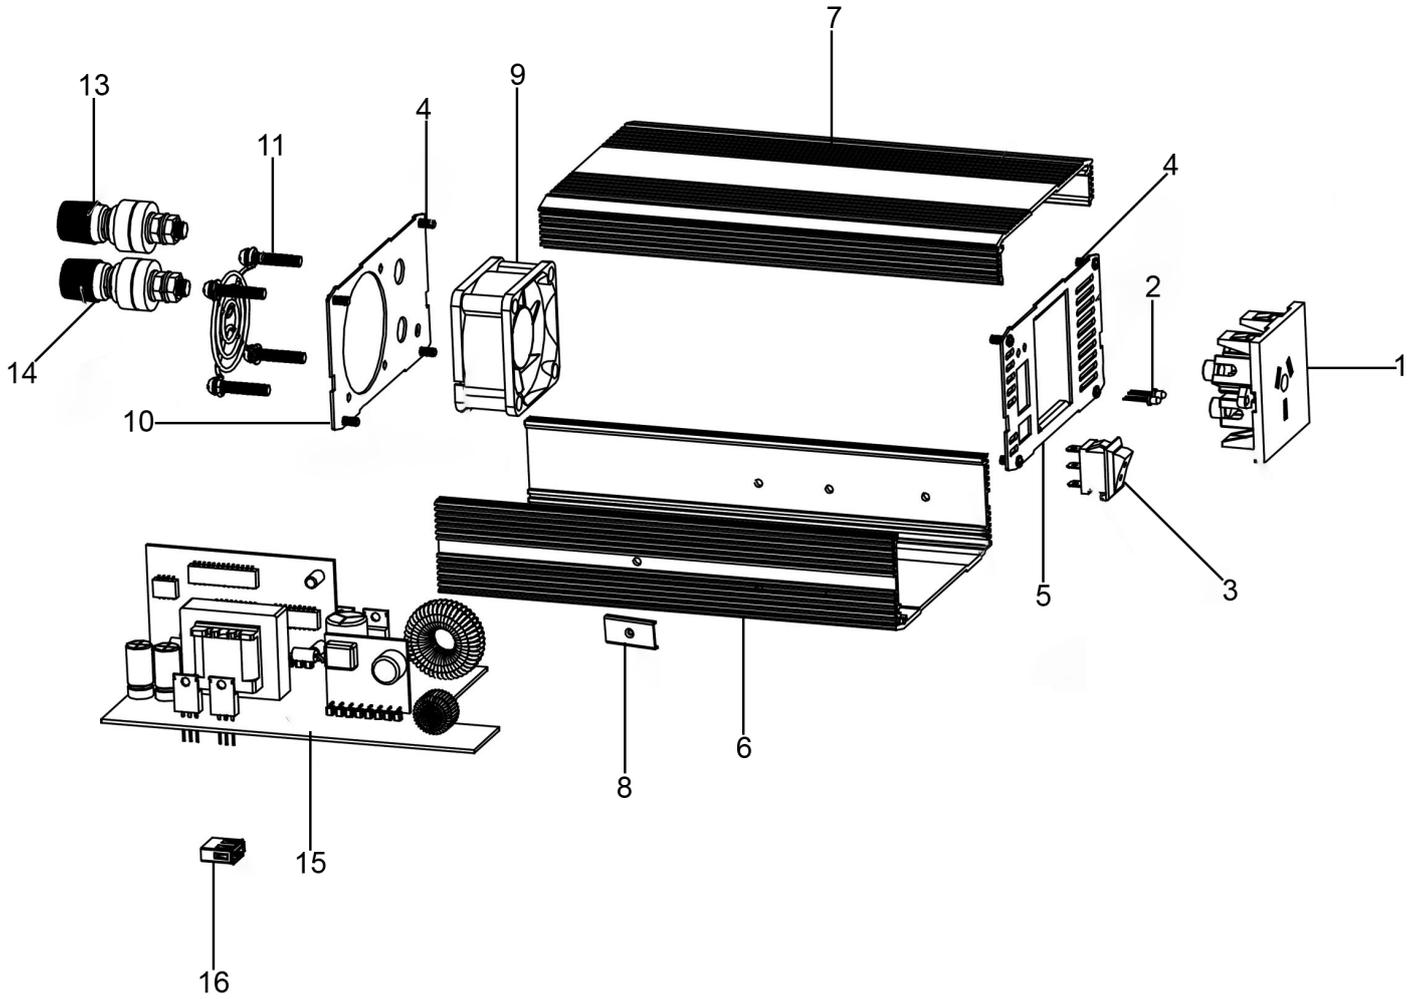

Item	Part No.	Description
1	PSI1000.01	Socket
2	PSI1000.02	Indicator Light
3	PSI1000.03	Switch, Power Rocker
4	PSI1000.04	Rd Head S/T Screw M3 x 6mm Black
5	PSI600.05	Front Panel
6	PSI300.V2-06	Lower Panel
7	PSI300.V2-07	Upper Panel
8	PSI1000.08	Side Cover
9	PSI300.V2-09	Fan

Item	Part No.	Description
10	PSI300.V2-10	Fan Cover
11	PSI300.V2-11	Screw
13	PSI600.13	Terminal, Positive
14	PSI600.14	Terminal, Negative
15	PSI300.V2-15	Circuit Board
16	PSI300.V2-16	USB Port
--	PSI300.V2-17	Cigarette Lighter Plug (Not Shown)
--	PSI300.V2-18	Fuse (Not Shown)

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice. There may be alternative versions of this product, please contact us should you require this information.

IMPORTANT: No liability is accepted for incorrect use of product. Spare parts must be fitted by a competent person

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



01284 703534



sales@sealey.co.uk



www.sealey.co.uk