

SIP Industrial Products
Limited

Gelders Hall Road
Shepshed
Loughborough

Leicestershire
LE12 9NH
United Kingdom



SIP Hardwood 4 Drawer Workbench



SIP Code 01460

Please read and fully understand the instructions in this manual before operation. Keep this manual safe for future reference.

For help or advice please contact your distributor, or SIP directly :

Tel.: 01509 500400 Email: sales@sip-group.com

customerservice@sip-group.com

www.sip-group.com























CONTENTS & ACCESSORIES



Note: The maximum weight the table can take is 100kgs.




Note: If any parts are missing, contact you distributor.

| | | |
|---|---|---|
| (A)  x2 | (G)  x4 | (M)  x4 |
| (B)  x1 | (H)  x2 | <div> (N)  x4 </div> <div> (S)  x4 </div> |
| (C)  x1 | (I)  x1 | (O)  x4 |
| (D)  x1 | (J)  x1 | <div> (P)  x4 </div> <div> (T)  x32 </div> |
| (E)  x2 | (K)  x1 | (Q)  x8 |
| (F)  x1 | (L)  x4 | (R)  x1 |


CONTENTS & ACCESSORIES Cont...

MAIN PARTS IDENTIFICATION

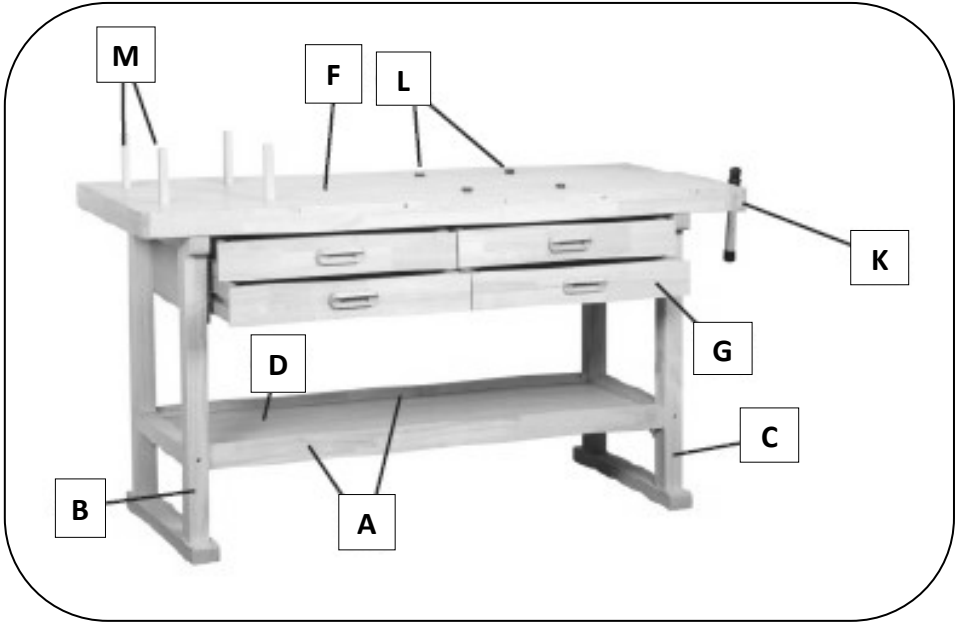


| <i>Item</i> | <i>Description</i> |
|-------------|-------------------------|
| A | Shelf Sides |
| B | Left Hand Side Support |
| C | Right Hand Side Support |
| D | Shelf |
| F | Table Top |
| G | Draw Assembly |
| K | Vice Clamp Assembly |
| L | Metal Peg / Dog |
| M | Wooden Peg |

ASSEMBLY INSTRUCTIONS

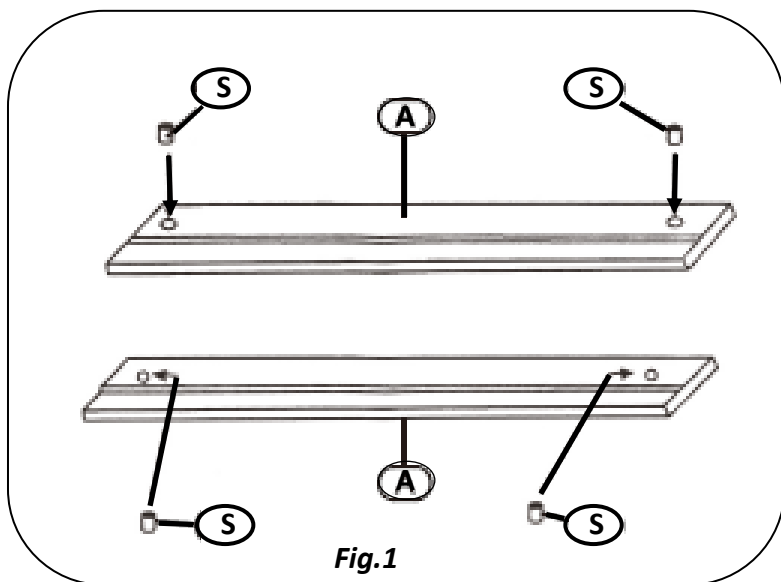


- Put **Screw Inserts (S)** into **Shelf Sides (A)**. (Fig.1)

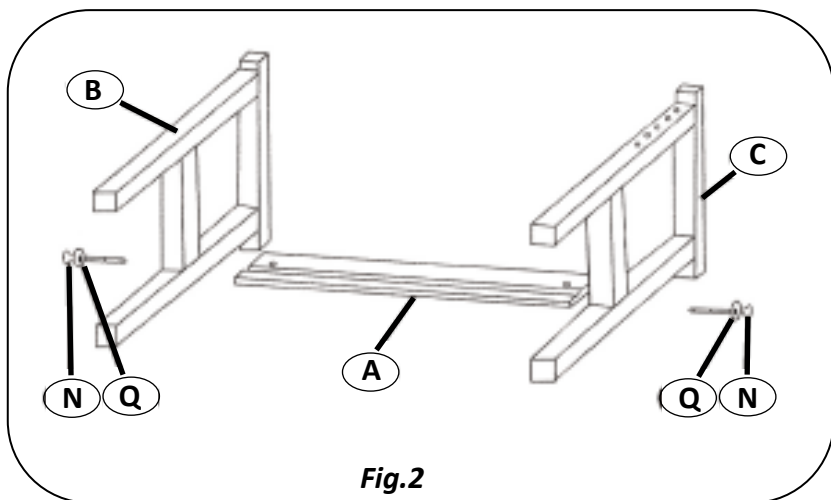


- Connect **Side Support (B) & (C)** together with 1 x **Shelf Side (A)**.
- Use fixings 2 x (Q) & 2 x (N). (Fig.2)


ASSEMBLY INSTRUCTIONS Cont...

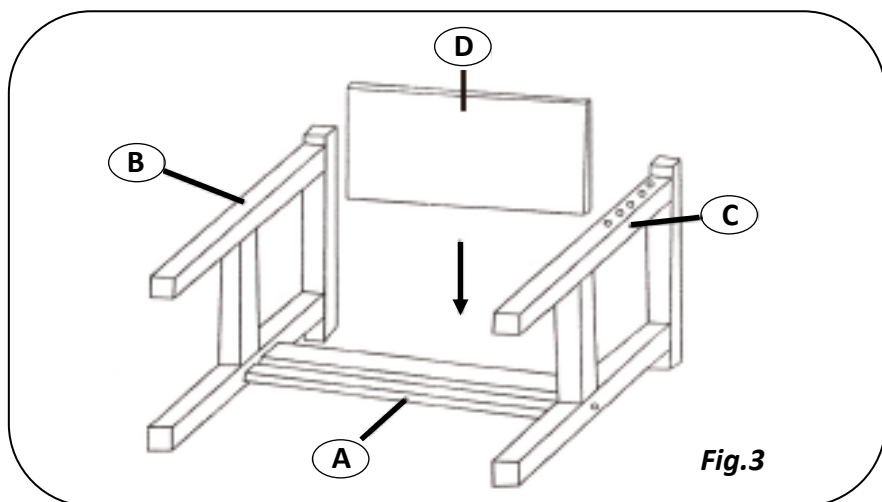

- Slide in **Shelf (D)** . (Fig.3)

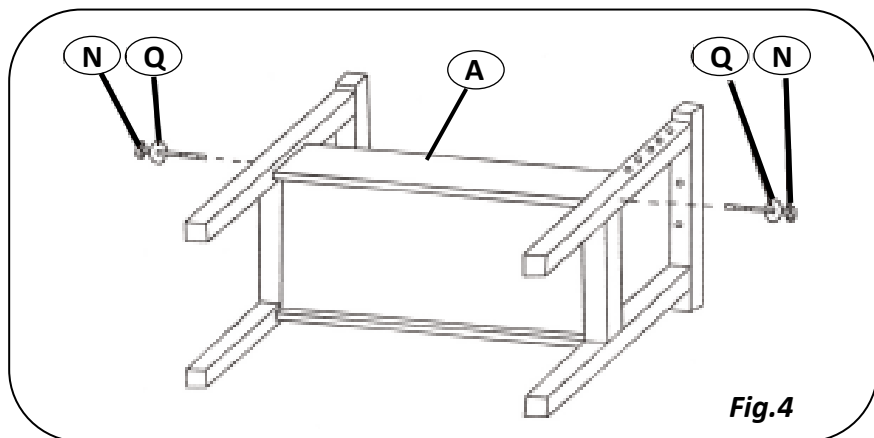

- Place remaining **Shelf Side Support "A"** into position.
- Secure using fixings **2 x (N)** & **2 x (Q)**. (Fig.4)

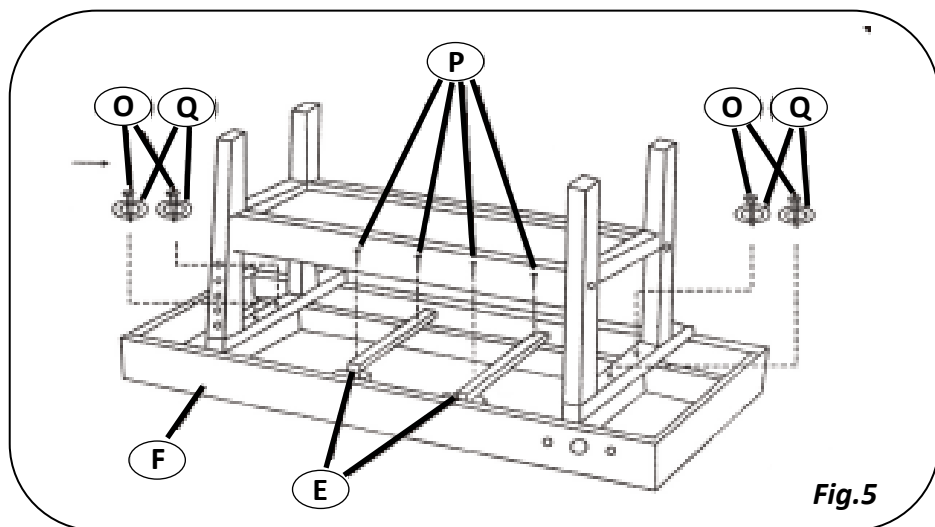


- Refer to **Fig.5**.
- Fit completed assembly (**Fig.4**) on to the **Table Top (F)**. Making sure that the **Table Top** is face down.
- Fix into position using **2 x (O) & 2 x (Q)** on the left and repeat using **2 x (O) & 2 x (Q)** on the right.
- Place **Supports (E)** in position on the **Table Top** and screw in position using fixings "**P**".
- **** Please note that depending on model variation, parts (E) could be replaced by a single vertical panel.****



Note: Place the top onto carboard or similar to reduce the risk of damage

DRAWER ASSEMBLY

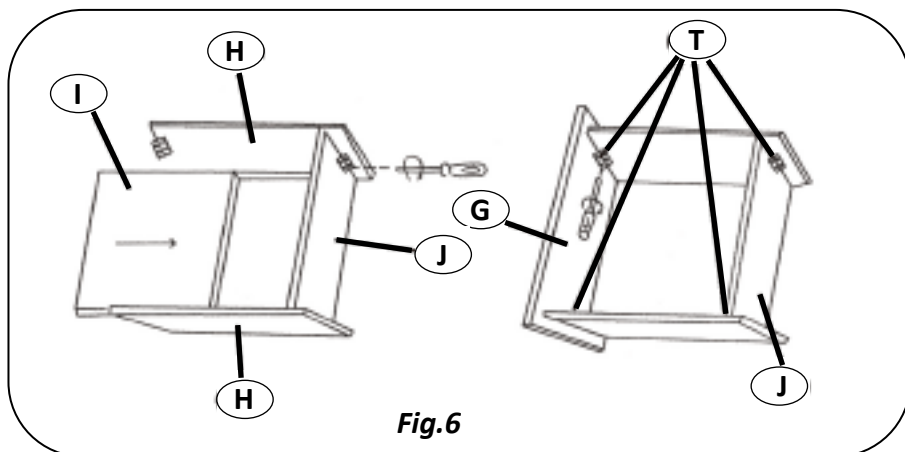


- Refer to **Fig.6**
- Join together panels **(H) & (J)** using screws **(T)**.
- Slide in **Draw Bottom (I)** and retain in place using screws **(T)**.
- Repeat for all four drawers.
- Fix drawer handles.



Note: Do not overtighten screw / bolts.

ASSEMBLY INSTRUCTIONS Cont...

FITTING THE VICE

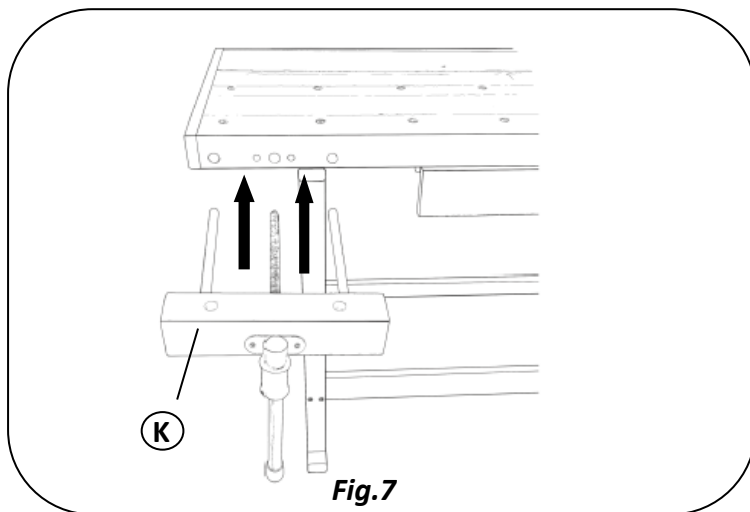

- Line up the threaded bar and the 2 x support bars of the **Vice Assembly (K)** with the 3 holes on the side of the workbench.

Please dispose of packaging for the product in a responsible manner. It is suitable for recycling. Help to protect the environment, take the packaging to the local amenity tip and place into the appropriate recycling bin.

Never dispose of electrical equipment or batteries in with your domestic waste. If your supplier offers a disposal facility please use it or alternatively use a recognised recycling agent. This will allow the recycling of raw materials and help protect the environment.



FOR HELP OR ADVICE ON THIS
PRODUCT PLEASE CONTACT
YOUR DISTRIBUTOR, OR SIP

DIRECTLY ON:
TEL: 01509 500400
EMAIL:

sales@sip-group.com

or

customerservice@sip-group.com

www.sip-group.com