

Assembly Sheet

COMBI BACK PANEL

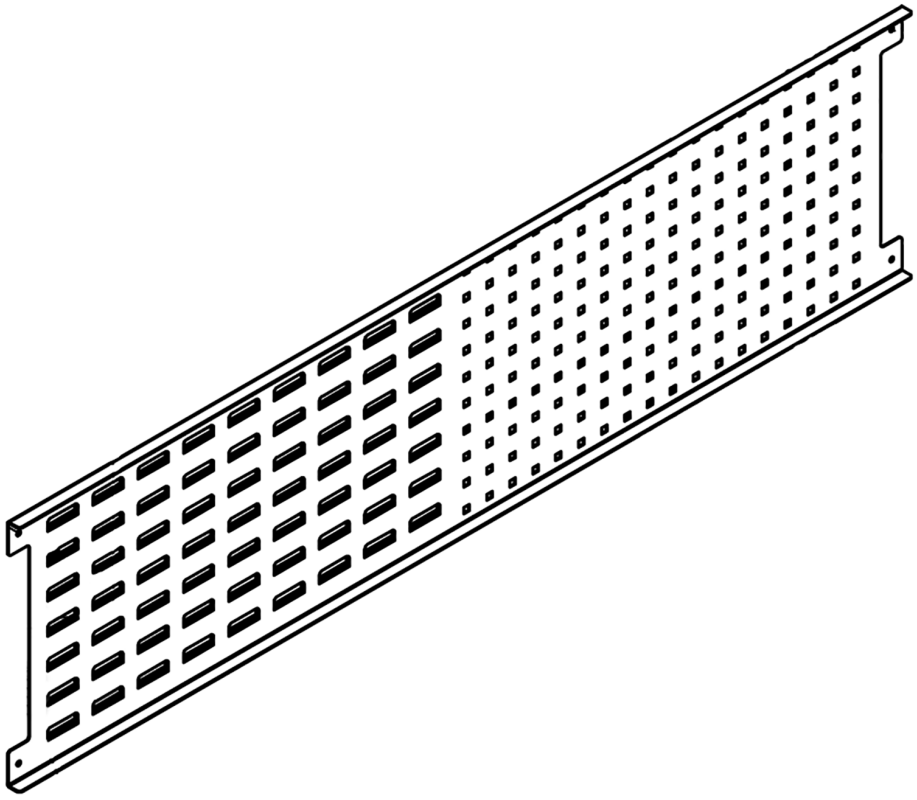

COMPONENTS CHECK LIST:



Back Panel
Quantity: 1



A
Nut M6x16
Quantity: 4



B
6
Quantity: 4



C
6
Quantity: 4



D
M6
Quantity: 4

Loading Information

Load capacities

Combi Back Panel Length	Load Capacity Per Shelf	Nett Weight
1500mm	45kg	7kg
1800mm	60kg	8kg

Maximum permitted capacities are based on UDL†.


IF YOU ARE IN ANY DOUBT REGARDING LOAD CAPACITIES, PLEASE CONTACT YOUR SUPPLIER

†UDL = Uniformly Distributed Load

If you have any missing components please take note of the part name and contact your supplier.

Panels are safe when used responsibly. If in doubt, contact the supplier.

COMBI BACK PANEL

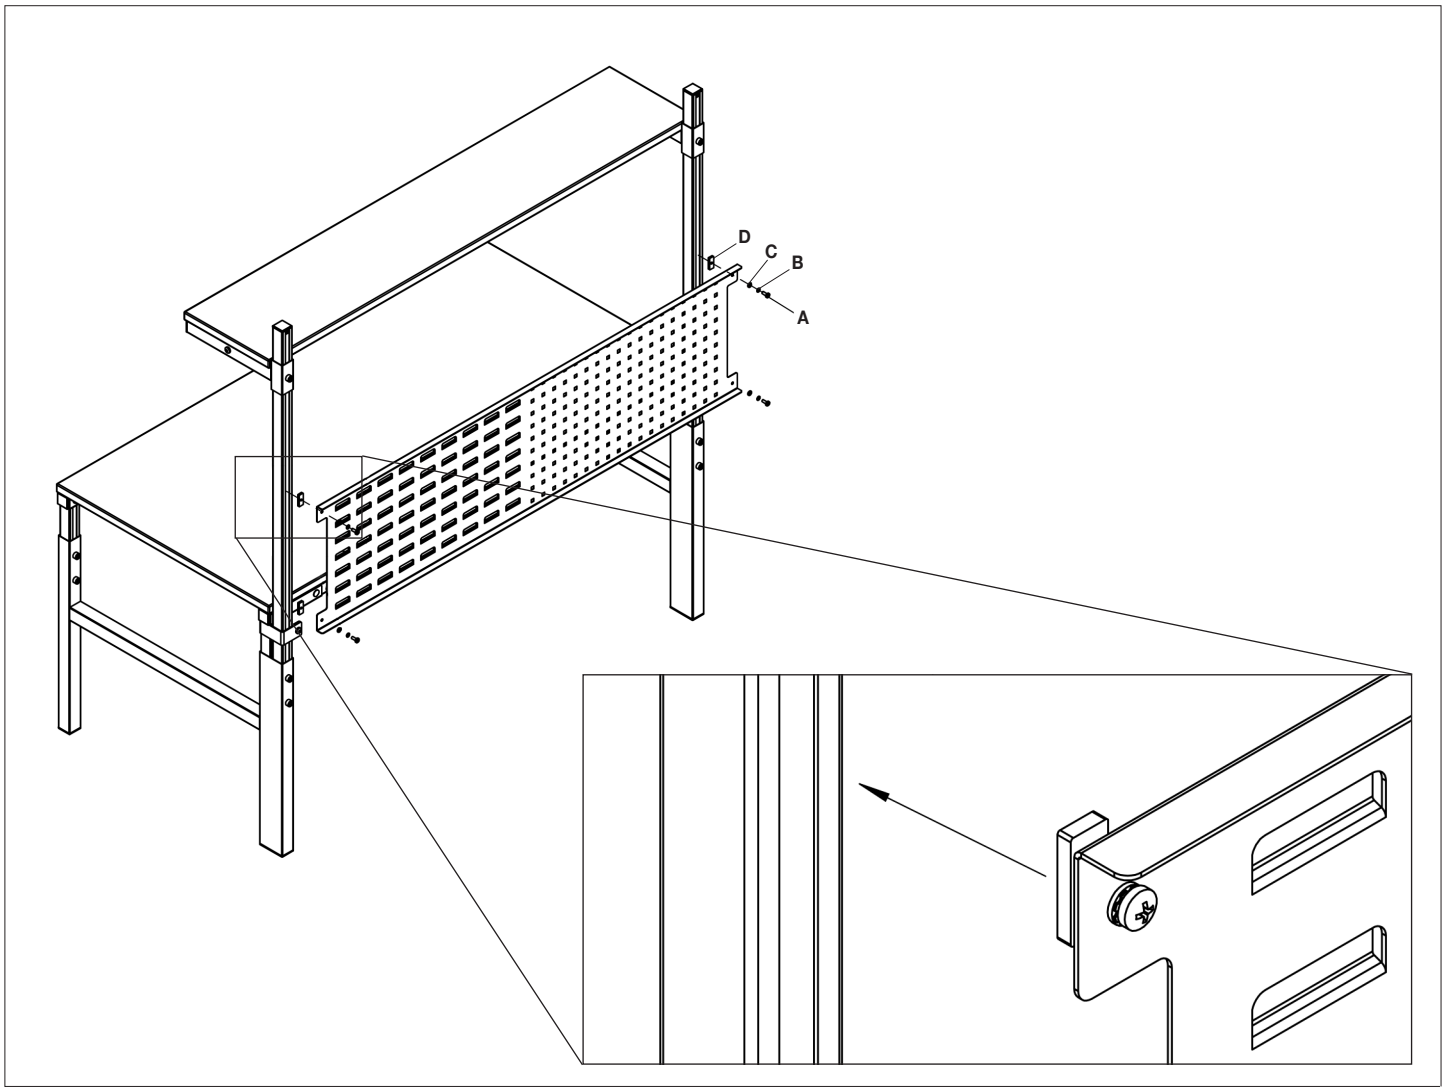

Safety Instructions

Information

If in doubt, contact the supplier:

- Read this guide before commencing assembly and retain for future reference
- Before commencing assembly, unpack carefully and check that all components ordered are included
- Assembly should be undertaken by two competent people
- Tools – Cross head screw driver required

Caution

During assembly, ensure to:

- Do not use a power drill to tighten the screws. Tighten by hand using a screwdriver
- Dispose of packaging materials responsibly

Warning

Rules for the safe use of workbenches:

- Ensure these instructions are retained for reference and that users are aware of the rules for safe use
- Do not stand on this bench. Do not use this bench/panel as a step ladder
- If parts are missing, broken, damaged or worn, stop use of this product until repairs are made using factory authorized parts
- Ensure that the maximum load carrying capacities are not exceeded

Note: Illustrations not to scale