



INSTRUCTIONS FOR
LOW NOISE BELT DRIVE COMPRESSOR
MODEL NO: **SAC2203BLN.V2**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instruction manual



Wear ear protection



Warning: Hot surface



Warning: Electricity



Warning: Automatic startup

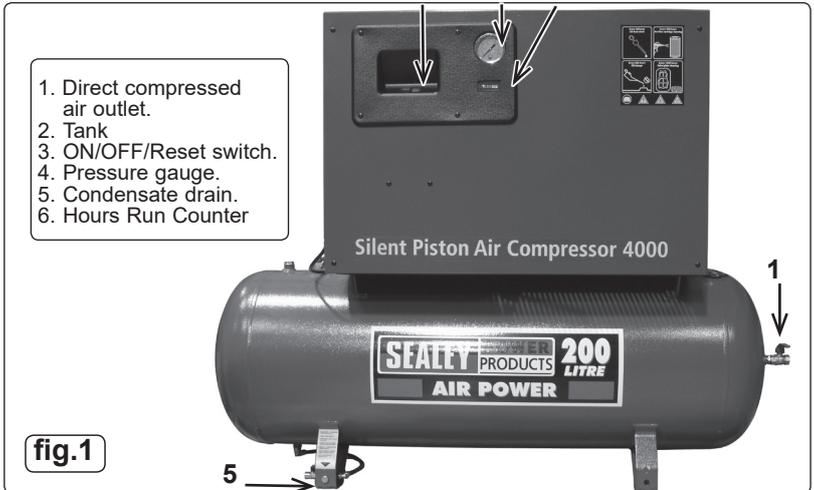


fig.1

1. SAFETY

1.1. ELECTRICAL SAFETY

- WARNING!** It is the responsibility of the owner and the operator to read, understand and comply with the following: You must check all electrical products, before use, to ensure that they are safe. You must inspect power cables, plugs, sockets and any other connectors for wear or damage. You must ensure that the risk of electric shock is minimised by the installation of appropriate safety devices. A Residual Current Circuit Breaker (RCCB) should be incorporated in the main distribution board. We also recommend that a Residual Current Device (RCD) is used. It is particularly important to use an RCD with portable products that are plugged into a supply which is not protected by an RCCB. If in any doubt consult a qualified electrician. You may obtain a Residual Current Device by contacting your Sealey dealer. You must also read and understand the following instructions concerning electrical safety.
- 1.1.1. The **Electricity at Work Act 1989** requires that all portable electrical appliances, if used on business premises, are tested by a qualified electrician, using a Portable Appliance Tester (PAT), at least once a year.
- 1.1.2. The **Health & Safety at Work Act 1974** makes owners of electrical appliances responsible for the safe condition of those appliances and the safety of the appliance operators. If in any doubt about electrical safety, contact a qualified electrician.
- 1.1.3. Ensure that the insulation on all cables and on the appliance is safe before connecting it to the power supply. See 1.1.1. and use a Portable Appliance Tester.
- 1.1.4. Ensure that cables are always protected against short circuit and overload.
- 1.1.5. Regularly inspect power supply cables and plugs for wear or damage and check all connections to ensure that none is loose.
- 1.1.6. **Important:** Ensure that the voltage marked on the appliance matches the power supply to be used and that the plug is fitted with the correct fuse.
 - * **DO NOT** pull or carry the appliance by the power cable.
 - * **DO NOT** pull the plug from the socket by the cable.
 - * **DO NOT** use worn or damaged cables, plugs or connectors. Immediately have any faulty item repaired or replaced by a qualified electrician.
- 1.1.7. Twin capacitors and a centrifugal switch aid trouble free starting on a good 13amp supply. In some cases a 16amp supply may be required and we recommend that a 16amp industrial round pin plug should be fitted and connected to a 20amp supply having a Type C breaker. If in doubt you must contact a qualified electrician to ensure that a suitably rated supply is available.
 - IMPORTANT!** The use of extension leads to connect these compressors to the mains is not recommended as the resulting voltage drop reduces motor, and therefore pump performance.
- 1.2. **GENERAL SAFETY INSTRUCTIONS**
 - ✓ Familiarise yourself with the application and limitations of the compressor.
 - ✓ Ensure the compressor is in good order and condition before use. If in any doubt **DO NOT** use the unit and contact an electrician/service agent.
 - WARNING!** Compressor must only be serviced by an authorised agent. **DO NOT** tamper with, or attempt to adjust the pressure switch or safety valve.

- ✓ Before moving, or maintaining the compressor ensure it is unplugged from the mains supply and that the air tank pressure has been vented.
- ✓ Maintain the compressor in good condition and replace any damaged or worn parts. Use genuine parts only. Unauthorised parts may be dangerous and will invalidate your warranty.
- ✓ Read the instructions relating to any accessory to be used with this compressor. Ensure the safe working pressure of any air appliance used exceeds compressors output pressure. If using a spray gun, check that the area selected for spraying is provided with an air change system/ventilation.
- ✓ Ensure the air supply valve is turned off before disconnecting the air supply hose.
- ✓ To move a transportable compressor use the handle only. Lift the compressor so that the front leg gives enough clearance for manoeuvring but maintain unit's centre of gravity in front of the wheels. **DO NOT** attempt to lift or move the compressor by any other means.
- ✓ Use the compressor in a well ventilated area and ensure it is placed on a firm surface.
- ✓ Keep tools and other items away from the compressor when it is in use, and keep area clean and clear of unnecessary items.
- ✓ Ensure the air hose is not tangled, twisted or pinched.
- ✓ Keep children and unauthorised persons away from the working area.
- ✓ Only move the compressor by the handle if portable.
- ✗ **DO NOT** dis-assemble compressor for any reason. The unit must be checked by qualified personnel only.
- ✗ **DO NOT** use the compressor outdoors, or in damp, or wet, locations.
- ✗ **DO NOT** operate within the vicinity of flammable liquids, gases or solids.
- ✗ **DO NOT** touch compressor cylinder, cylinder head or pipe from head to tank as these may be hot.
- ✗ **DO NOT** use this product to perform a task for which it has not been designed.
- ✗ **DO NOT** deface the certification plate attached to the compressor tank.
- ✗ **DO NOT** cover the compressor or restrict air flow around the unit whilst operating.
- ▲ **DANGER! DO NOT** direct the output jet of air towards people or animals.
- ✗ **DO NOT** operate the compressor without an air filter.
- ✗ **DO NOT** allow anyone to operate the compressor unless they have received full instructions.
- **WARNING!** The air tank is a pressure vessel and the following safety measures apply:
 - ✗ **DO NOT** tamper with the safety valve, **DO NOT** modify or alter the tank in any way and **DO NOT** strap or weld anything to the tank.
 - ✗ **DO NOT** subject the tank to impact, vibration or to heat and **DO NOT** allow contact with abrasives or corrosives.
- ✓ Drain condensation from tank daily and inspect inside walls for corrosion every three months and have a detailed tank inspection carried out annually. The tank shell must not fall below the certified thickness at any point.
- **WARNING!** If an electrical fuse blows, ensure it is replaced with an identical fuse type and rating.
- ✓ When not in use, store the compressor carefully in a safe, dry, childproof location.
- ✓ When the compressor is not in use it should be switched off, disconnected from the mains supply and the air drained from the tank.
- ✗ **DO NOT** carry out any welding operations on any pressurised parts of the vessel.

1.3. INSPECTION OF PRESSURE TANK BOTH INTERNAL AND EXTERNAL

- 1.3.1. Under the **Pressure Systems Safety Regulations 2000** it is the responsibility of the owner of the compressor to initiate a system of inspection that both defines the frequency of the inspection and appoints a person who has specific responsibility for carrying out the inspection.

IMPORTANT WARNING - Air contaminants taken into the compressor will affect optimum performance. Example: Body filler dust or paint overspray will clog the pump intake filter and may cause internal damage to pump/motor components. Please note that any parts damaged by any type of contamination will not be covered by warranty.

2. INTRODUCTION





Heavy-duty low noise compressor suitable for garage, bodyshop and industrial applications. Fitted with cast iron cylinder head enabling slower revving and improved pump life. Fully enclosed, insulated design gives quiet running at just 68dB(A) (at 1mtr) and protects vital components from damage. Features fully automatic pressure cut out switch and tank pressure gauge. Heavy-duty single phase electric motor with soft start feature. Control box features tachometer for monitoring use and optimizing service times. Supplied with full CE certification, test certificate, operating/maintenance manual.

3. SPECIFICATION

Model	SAC2203BLN.V2
Motor Output	3hp
Supply Voltage	230V
Phase	1ph
Minimum Rated Supply	16A
Speed	1075rpm
Air displacement cfm(ltr/m)	15/425
Noise Level	68dB(A)
Max Free Air Displacement cfm(ltr/m)	10.9/309
Max Pressure	145/10psi(10bar)
Receiver Capacity	200ltr
Outlet	1/2" BSP Female Tap
Dimensions (WxDxH)	1440x440x1210mm
Weight	175kg

4. ASSEMBLY

- 4.1. Remove compressor from packaging and inspect for any shortages or damage. If anything is found to be missing or damaged contact your Sealey stockist.
- 4.2. Save the packing material for future transportation of the compressor. We recommend that you store the packing in a safe location, at least for the period of the guarantee. Then, if necessary, it will be easier to send the compressor to the service centre.
- 4.3. Confirm that the mains voltage corresponds with the voltage shown on the compressor data plate.
- 4.4. Position the compressor on a flat surface or with a maximum permissible inclination of 10°. Site in a well ventilated place, protected against atmospheric pollution and not in a place subject to explosion hazard. If the surface is inclined and smooth, check if the compressor moves while in operation. If the surface is inclined make sure it cannot fall, securing it in a suitable way.
- 4.5. To ensure good ventilation and efficient cooling, the compressor's belt guard must be at least 100cm from any wall (fig.2). Compressors fitted on the tank, with fixed feet, should not be rigidly secured to the ground. In this case, we advise you to fit 4 anti-vibration supports. Fit the 4 anti-vibration supports, raise the compressor using a suitable pallet truck or fork lift and push the supports onto the base of each foot (fig.3).
- 4.6. Take care to transport the compressor correctly, **DO NOT** overturn it or lift it with hooks or ropes.
- 4.7. Remove the plastic transit plug from the oil filler hole (fig.4A) and replace it with the filler/breather plug as shown in fig.4B. It is a push fit, ensure that it is pushed fully home.
- 4.8. Before using the compressor, check the oil level by observing the sight glass as shown in fig.5. If the oil is not up to the max mark it should be topped up with synthetic oil suitable for temperatures ranging from -5°C to 45°C (viscosity 5W50). We **DO NOT** recommend using mineral oil in these compressors. **DO NOT** overfill.
NOTE: To gain access to the pump and motor you must remove the 4 bolts from the top lid of the sound proof casing. For some servicing such as draining oil, you must also remove the rear panel by removing the 4 bolts.

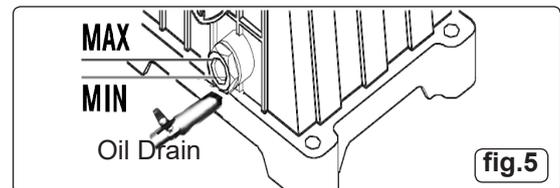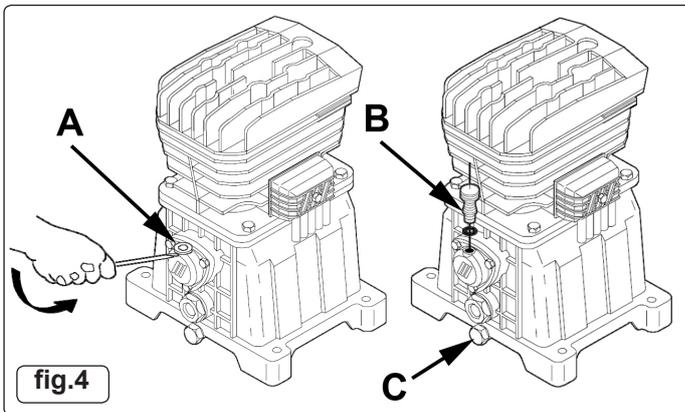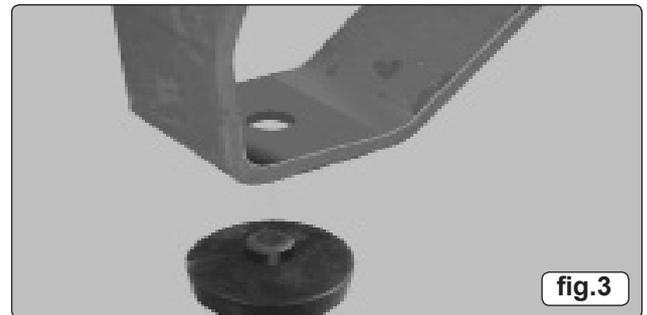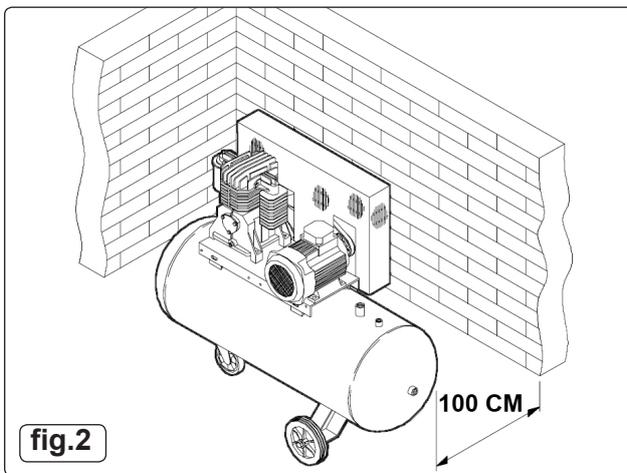

5. OPERATION


- WARNING!** Ensure that you have read, understood and apply Section 1 safety instructions.
 - IMPORTANT!** The use of extension leads to connect this compressor to the mains supply is not recommended as the resulting voltage drop reduces motor, and therefore pump performance and could cause damage to your compressor.
NOTE: Take care when selecting tools for use with the compressor. Air tool manufacturers normally express the volume of air required to operate a tool in cubic feet per minute (cfm). This refers to free air delivered by the compressor ('air out') which varies according to the pressure setting. **DO NOT** confuse this with the compressor displacement which is the air taken in by the compressor ('air in'). 'Air out' is always less than 'air in' due to losses within the compressor.
- 5.1. **STARTING THE COMPRESSOR**
 - 5.1.1. To turn the compressor on, plug mains lead into mains supply, press the "ON" button on the front panel See fig.6.
 - 5.1.2. When starting the compressor for the first time, leave it running with no air tools connected to the air outlet. Make sure that pressure in the tank rises and that the compressor stops automatically when the maximum pressure value allowed (written on the plate and shown on the gauge in fig.6) is achieved. The compressor will now operate automatically. The pressure switch stops the motor when the maximum tank pressure is reached and restarts it when the pressure falls below the minimum threshold - approx. 2bar (29psi) less than the maximum pressure.
 - 5.1.3. Stop the compressor by pressing the "OFF/RESET" button in fig.6. The compressed air inside the compressor head will flow out, making

the restart easier and preventing the motor from being damaged. **DO NOT**, other than in an emergency, stop the compressor by switching off the mains power, or by pulling the plug out, as the pressure relief will not then operate and motor damage may result upon restart.

- 5.1.4. The motor of the compressor is fitted with a thermal breaker. The manual resetting button is doubled up with the "OFF" button (fig.6). When the breaker is tripped, wait for a few minutes and then press the reset button. If the unit keeps tripping investigate and rectify the cause.

NOTE: If the motor does not cut in and out, but runs continuously when using an air appliance, the capacity of the compressor may be too small for the equipment or tool.

- **WARNING! DO NOT** tamper with, or adjust, the switch or safety valve.

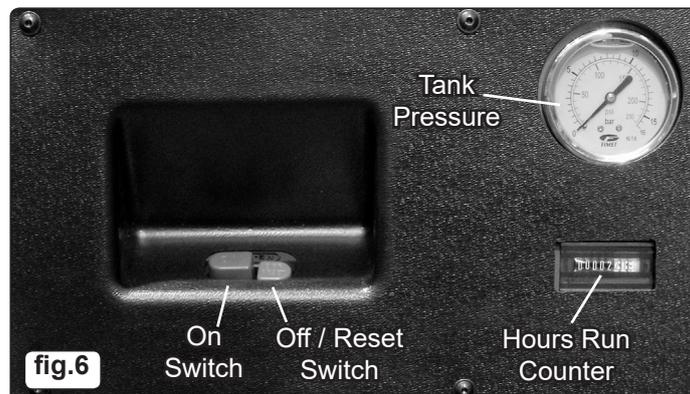

6. MAINTENANCE

- 6.1. In order to keep the compressor in good working condition, periodic maintenance is essential.

- **IMPORTANT!** Failure to carry out maintenance tasks may invalidate the warranty on your compressor.

- Inspection of pressure tank both inside and out. Under the Pressure Systems Safety Regulations 2000 it is the responsibility of the owner of the compressor to initiate a system of inspection that both defines the frequency of the inspection and appoints a person who has specific responsibility for carrying out the inspection.

- **WARNING!** Before performing any maintenance operation, switch off the compressor, disconnect from electricity supply and release all air from the tank.

NOTE! To gain access to the pump and motor you must remove the 4 bolts from the top lid of the sound proof casing. For some servicing such as draining oil, you must also remove the rear panel by removing the 4 bolts.

- * **DO NOT** operate the compressor without the panels fitted.

- 6.1.1. OPERATIONS TO BE CARRIED OUT AFTER THE FIRST 50 WORKING HOURS:

- a) Check that all bolts/nuts are tight, particularly those retaining the crankcase and cylinder head.
- b) Replace the lubricating oil.

- 6.1.2. OPERATIONS TO BE CARRIED OUT WEEKLY:

- a) Drain condensation by opening the valve located under the tank (fig.8). Place a container under the valve and open the valve by turning anti-clockwise.

- **WARNING!** Take care if there is still pressure inside the cylinder as water could flow out with considerable force. Recommended pressure 1 - 2bar max.

- b) Check oil level and, if necessary, top up.

- 6.1.3. OPERATIONS TO BE CARRIED OUT EVERY 50 - 100 HOURS: (or more frequently, if the compressor operates in a very dusty atmosphere):

- a) Remove the air filter element (fig.7). Using stored air from the compressor's tank, clean the filter with compressed air. (Wear eye protection and **DO NOT** direct air towards the body or hands). **DO NOT** operate the compressor without the filter as foreign bodies or dust could seriously damage the pump. Replace the filter element and air filter housing.

- b) Check for oil leaks.

- c) Check the automatic cut-out at max. pressure and the automatic cut-in at 2bar below.

- 6.1.4. OPERATIONS TO BE CARRIED OUT EVERY 400 - 500 HOURS DEPENDING ON CONDITIONS (IF THE COMPRESSOR OPERATES IN A DUSTY OR HARSH ATMOSPHERE USE 400 HOURS)

- a) Replace the lubricating oil. For oil specifications see 6.2.

Remove the filler/breather plug (see fig.4-B) then open oil drain tap, draining the oil into a container. Drain when the compressor is hot so that the oil drains rapidly and completely. Replace oil drain plug and refill through the filler/ breather aperture. **DO NOT** overfill. Check sight glass for correct level. Replace plug.

- **WARNING!** Never mix different oils and **DO NOT** use non-detergent/low quality oils as the compressor may be damaged.

- **WARNING!** Dispose of waste oil only in accordance with local authority requirements.

- b) Replace air filter. (See fig.7)

- c) Check all tube fittings and electrical connections.

- d) Inspect pressure tank inside and out for damage or corrosion.

- 6.2. **RECOMMENDED OILS**

Synthetic oil suitable for temperatures ranging from -5°C to 45°C: viscosity 5W50. We **DO NOT** recommend using mineral oil in this compressor.

Part No.	Qty	Description
FSO1	1ltr x 12	Compressor oil fully synthetic
FSO1S	1ltr x 1	Compressor oil fully synthetic
FSO5	5ltr x 1	Compressor oil fully synthetic

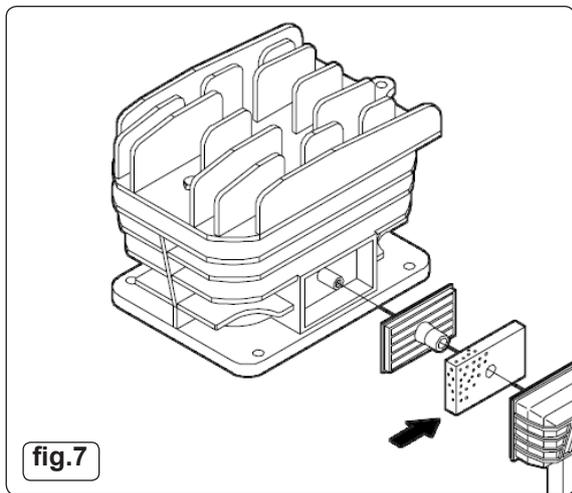


fig.7

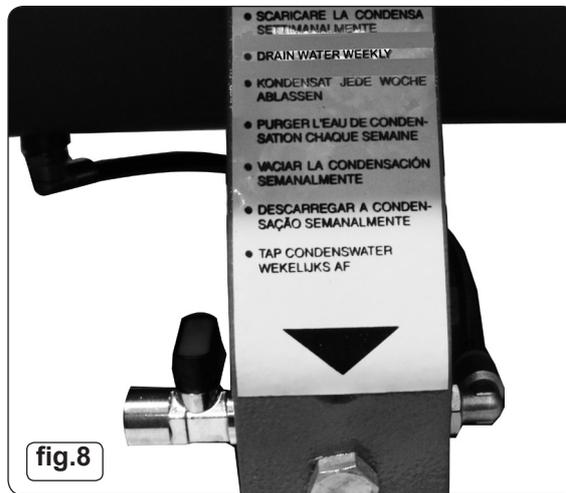


fig.8

7. TROUBLESHOOTING

Fault	Cause	Remedy
Pressure drop in the tank.	Air leaks at connections.	Run compressor to max. pressure, switch off. Brush soap solution over connections and look for bubbles. Tighten connections showing leaks. If problem persists contact Authorised Service Agent.
Pressure switch valve leaks when compressor is idle.	Non-return valve seal defective.	Discharge all tank pressure. Referring to fig.9, unscrew valve cap 'A'. Clean rubber disc 'B' and its seat. Refit all parts accurately.
Compressor stops and does not restart.	Power failure. Motor failure.	Check electricity supply and fuse. Contact Authorised Service Agent.
Compressor does not stop at max pressure.	Pressure switch fault.	Contact Authorised Service Agent.
Compressor does not reach max pressure.	Filter clogged. Head gasket or valve fault.	Replace filter element. Contact Authorised Service Agent.
Compressor noisy with metallic knock.	Low oil level. Bearing or piston damage.	Turn off and top up oil immediately. Contact Authorised Service Agent.

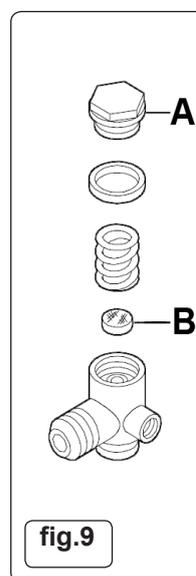


fig.9



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



01284 703534



sales@sealey.co.uk



www.sealey.co.uk