



AIR PUNCH/FLANGE TOOL

MODEL NO: SA36.V2

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instruction manual



Wear eye protection



Wear ear protection



Wear protective gloves

1. SAFETY

- ✓ Follow all workshop Health & Safety rules, regulations and conditions when using this tool.
- ❑ **WARNING!** Disconnect from air supply before servicing.
- ✓ Maintain tool in good condition and replace any damaged or worn parts. *Use genuine parts only. Unauthorised parts may be dangerous and will invalidate the warranty.*
- ❑ **WARNING!** Check correct air pressure is maintained and not exceeded. We recommend 90psi.
- ✓ Keep air hose away from heat, oil and sharp edges. Check air hose for wear before each use and ensure that all connections are secure.
- ❑ **WARNING!** Always wear approved eye and face protection when operating the tool.
- ✓ Wear appropriate personal protective equipment.
- ✓ Keep hands and body clear of the workpiece when operating the tool.
- ✓ Maintain correct balance and footing. Ensure the floor is not slippery and wear non-slip shoes.
- ✓ Secure unstable workpiece with a clamp, vice or other adequate holding device.
- ✓ Keep children and non-essential persons away from the work area.
- ✗ **DO NOT** get the tool wet or use in damp or wet locations.
- ✗ **DO NOT** hold the workpiece by hand. Use clamps or a vice to secure the workpiece.
- ✗ **DO NOT** use the tool for a task it is not designed to perform.
- ❑ **WARNING! DO NOT** use the tool if damaged or faulty. Contact your local service agent.
- ✗ **DO NOT** use the tool unless you have been instructed in its use by a qualified person.
- ✗ **DO NOT** carry the tool by the air hose, or yank the hose from the air supply.
- ✗ **DO NOT** direct air from the air hose at yourself or others.
- ✗ **DO NOT** operate tool if you are tired or under the influence of alcohol, drugs or intoxicating medication.
- ✓ When not in use, disconnect from air supply and store in a safe, dry, childproof location.




2. INTRODUCTION

Suitable for heavy bodyshop use. Aluminium alloy body with steel punch and die. Puts a 10mm flange onto car panel thickness sheet for lap jointing and puts Ø5mm holes in panels for MIG spot-welding.


3. SPECIFICATION

Model no SA36.V2
 Air consumption 2.0cfm
 Air inlet size..... 1/4" BSP
 Consumable parts:
 SA36.V2-06 - Replacement Punch; SA36.V2-03 - Replacement Die
 Noise power/pressure 85/74dB(A)
 Operating pressure 90psi
 Vibration/uncertainty 0.8/0.57m/s²

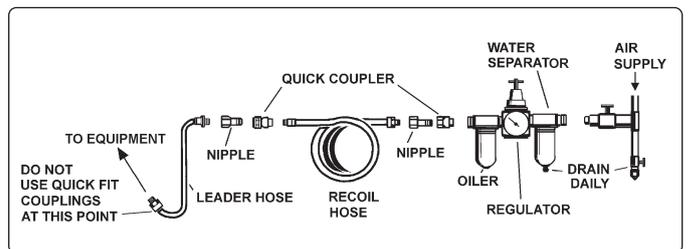

4. PREPARATION

- 4.1. AIR SUPPLY**
- 4.1.1. Ensure that the tool air valve is in the "Off" position before connecting to the air supply.
- ❑ **WARNING!** Ensure the air supply is clean and does not exceed 90 psi (6.2 bar) while operating the tool. Too high an air pressure and/or unclean air will shorten the life of the tool due to excessive wear and may be dangerous causing damage and/or personal injury.
- 4.1.2. Drain the compressor air tank daily. Water in the air line will damage the tool.
- 4.1.3. Clean the compressor air inlet filter weekly. Recommended hook-up is shown in fig. 1.
- 4.1.4. Line pressure should be increased to compensate for unusually long air hoses (over 8 metres). The minimum hose bore should be 3/8" and fittings must have the same inside dimensions.
- 4.1.5. Keep the hose away from heat, oil and sharp edges. Check hose for wear, and make certain that all connections are secure.
- 4.2. COUPLINGS**
- 4.2.1. Vibration may cause failure if a quick change coupling is connected directly to the tool.

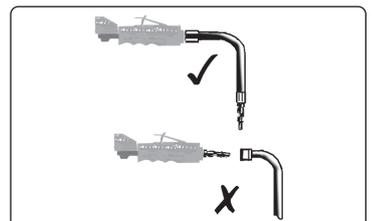

- 4.2.2. To overcome this, connect a leader hose to the tool. A quick change coupling may then be used to connect the leader hose to the air line recoil hose. See figs. 1 & 2.

5. OPERATION

- **WARNING!** Ensure that you read, understand and apply the safety instructions.
- 5.1. Connect the tool to the air supply.
- 5.2. To start the tool, hold firmly and squeeze the throttle lever. The clamp will move down, punching a hole/forming a flange, as required.
- 5.3. Release the lever and the clamp will rise allowing the tool to be positioned for the next operation.
- 5.4. After use, disconnect the tool from the air supply, clean and store in a safe, dry, childproof location.

6. MAINTENANCE

Note: Numbers/letters in brackets refer to those on the parts diagram.

- **WARNING!** Disconnect the tool from the air supply before changing accessories, servicing or performing maintenance. Replace or repair damaged parts. *Use genuine parts only. Unauthorised parts may be dangerous and will invalidate the warranty.*
- 6.1. If the compressed air system does not have an integral oiler then lubricate the tool daily with a few drops of Sealey air tool oil dripped into the air inlet.
- 6.2. Regularly check oil, and top-up if necessary, via the oil plug (13). Use Sealey Air Tool Oil, Part No. ATO500S.
- 6.3. Clean the tool after use.
- 6.4. Loss of power or erratic action may be due to the following:
 - a) Excessive drain on the air line. Moisture or restriction in the air pipe. Incorrect size or type of hose connectors. To remedy, check the air supply and follow instructions in Section 4.
 - b) Grit or gum deposits in the tool may also reduce performance. If your model has an air strainer (located in the area of the air inlet), remove the strainer and clean it. Flush out the tool with gum solvent oil or an equal mixture of SAE 10 oil and paraffin. Allow to dry before use.
- 6.5. For a full service contact your local Sealey service agent.
- 6.6. To remove and replace the punch (6) and/or die (3) proceed as follows:
 - 6.6.1. Remove screws (7) and slide off cover plate (8).
 - 6.6.2. Slacken set screw (2) and strike rear edge of clamp (1) with a soft-headed hammer in order to unscrew it from the shaft of the hydraulic piston (31). If necessary the shaft may be locked by removing the oil plug (13) and inserting a suitable rod into a hole in the shaft.
 - 6.6.3. Fully unscrew the clamp (1) and anvil (9) assembly from the shaft.
 - 6.6.4. Separate the anvil (9) and the clamp (1) to replace the punch (6) and/or die. The die (3) is a push fit in the clamp (1) and can be tapped out via the waste bore (A). Push/tap in the replacement.
 - 6.6.5. Reassemble the anvil (9), clamp (1) and the replacement punch (6) and screw onto the shaft. Tap with a soft-headed hammer to ensure tightness and lock with the set screw (2).
 - 6.6.6. Refit the cover plate (8) and retain with screws (7).

- **WARNING! – Risk of Hand Arm Vibration Injury.**

This tool may cause Hand Arm Vibration Syndrome if its use is not managed adequately.

This tool is subject to the vibration testing section of the Machinery Directive 2006/42/EC.

This tool is to be operated in accordance with these instructions.

Measured vibration emission value (a): 0.8 m/s²

Uncertainty value (k): 0.57 m/s²

Please note that the application of the tool to a sole specialist task may produce a different average vibration emission. We recommend that a specific evaluation of the vibration emission is conducted prior to commencing with a specialist task.

A health and safety assessment by the user (or employer) will need to be carried out to determine the suitable duration of use for each tool.

NB: Stated Vibration Emission values are type-test values and are intended to be typical.

Whilst in use, the actual value will vary considerably from and depend on many factors.

Such factors include; the operator, the task and the inserted tool or consumable.

NB: ensure that the length of leader hoses is sufficient to allow unrestricted use, as this also helps to reduce vibration.

The state of maintenance of the tool itself is also an important factor, a poorly maintained tool will also increase the risk of Hand Arm Vibration Syndrome.

Health surveillance.

We recommend a programme of health surveillance to detect early symptoms of vibration injury so that management procedures can be modified accordingly.

Personal protective equipment.

We are not aware of any personal protective equipment (PPE) that provides protection against vibration injury that may result from the uncontrolled use of this tool. We recommend a sufficient supply of clothing (including gloves) to enable the operator to remain warm and dry and maintain good blood circulation in fingers etc. Please note that the most effective protection is prevention, please refer to the Correct Use and Maintenance section in these instructions. Guidance relating to the management of hand arm vibration can be found on the HSC website

www.hse.gov.uk - Hand-Arm Vibration at Work.



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice. Please note that other versions of this product are available. If you require documentation for alternative versions, please email or call our technical team on technical@sealey.co.uk or 01284 757505.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



01284 703534



sales@sealey.co.uk



www.sealey.co.uk