


HEAVY-DUTY RUBBER STABLE MAT




The BiGDUG Heavy Duty Rubber Stable Mats are manufactured with a 2-layer system with coarse granules on the bottom and the top 5mm using fine granules. Designed for use in stable and equestrian areas to provide shock absorption, sound insulation and a non-slip surface.


Product codes:
BDSM10 | BDSM15 | BDSM20 | BDSM30

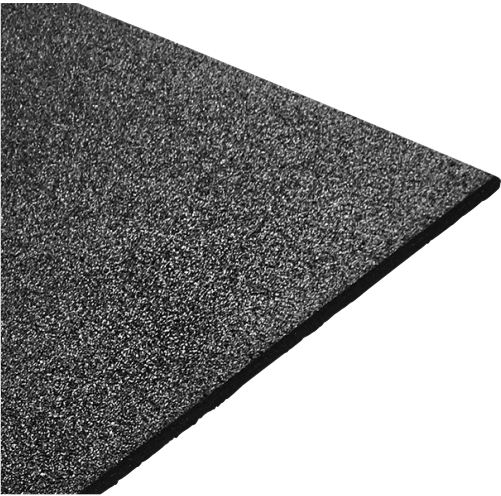


BDSM10

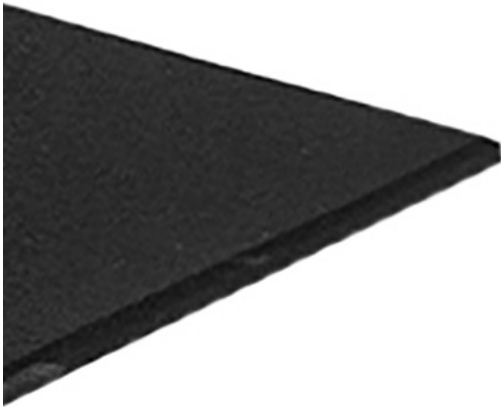

BDSM15

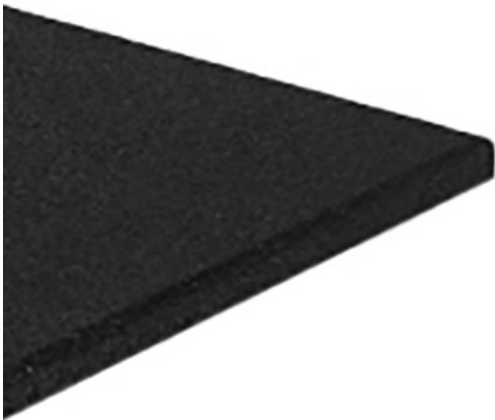

BDSM20

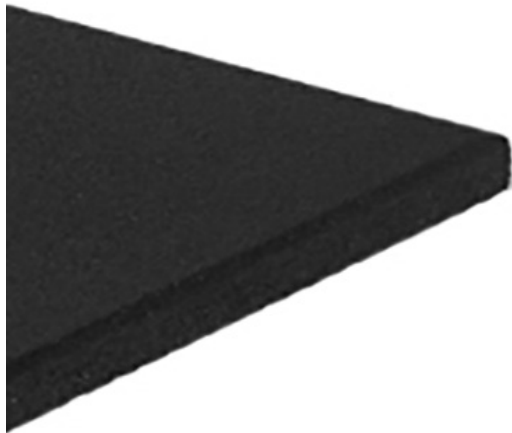

BDSM30

Product		Part				
Brand	BiGDUG Essentials	Part Code	BDSM10	BDSM15	BDSM20	BDSM30
Range	Stable Mats	Material	Recycled SBR Rubber Granules From 70% Dutch Truck Tyres, Bonded With PU	Recycled SBR Rubber Granules From 70% Dutch Truck Tyres, Bonded With PU	Recycled SBR Rubber Granules From 70% Dutch Truck Tyres, Bonded With PU	Recycled SBR Rubber Granules From 70% Dutch Truck Tyres, Bonded With PU
Solid or Drainage	Solid	Surface Finish	Non-Slip	Non-Slip	Non-Slip	Non-Slip
Properties	Tough Elastic, High Compression Resistance and Impact Strength	Size	1000mm x 1000mm	1000mm x 1000mm	1000mm x 1000mm	1000mm x 1000mm
Tolerances	Length and Width ± 1.5%, Thickness ± 2 mSm	Product Height	10mm	15mm	20mm	30mm
Slip Resistance Dry Conditions	<105PTV - EN 13036-4:2004	Product Weight	10kg	15kg	20kg	28kg
Slip Resistance Wet Conditions	<75PTV - EN 13036-4:2004	Product Colour	Black (other colours on request)	Black (other colours on request)	Black (other colours on request)	Black (other colours on request)
Abrasion Resistance, MG	<560 - EN ISO 5470-1:2001	Country of Origin	Netherlands	Netherlands	Netherlands	Netherlands
Tensile Strength, MPA	>0,65	ICN Code	40169100	40169100	40169100	40169100
Elongation at Break	>40% - EN 12230:2005					
Hardness	55 up to 75 SHORE A - ISO 868 PN-93 / C-04206					
Density	950 to 1.000kg/m³ - EN ISO 845:2010					
Fire Classification	EFL s1 (DFL & CFL Available) - NOT TESTED					

Note: Images are not to scale.