

## BIG400 SHELVING LOAD CAPACITY CHARTS

### CHIPBOARD & MELAMINE SHELVES

Chipboard & Melamine Shelves			Number of Levels/ Max UDL* (kg) Per Level			
Heights mm	Width mm	Depth mm	3	4	5	6
1677 & 1980	1220	455	375	400	375	360
1677 & 1980	1220	610	375	400	375	360
1677 & 1980	1220	760	375	400	375	360
1677 & 1980	1220	915	375	400	375	360
1677 & 1980	1220	1220	375	400	375	360
1677 & 1980	1525	455	375	400	375	360
1677 & 1980	1525	610	375	400	375	360
1677 & 1980	1525	760	375	400	375	360
1677 & 1980	1525	915	375	400	375	360
1677 & 1980	1525	1220	375	400	375	360
1677 & 1980	1830	455	375	400	375	360
1677 & 1980	1830	610	375	400	375	360
1677 & 1980	1830	760	375	400	375	360
1677 & 1980	1830	915	375	400	375	360
1677 & 1980	1830	1220	375	400	375	360
1677 & 1980	2135	455	375	400	375	360
1677 & 1980	2135	610	375	400	375	360
1677 & 1980	2135	760	375	400	375	360
1677 & 1980	2135	915	375	400	375	360
1677 & 1980	2135	1220	375	400	375	360
1677 & 1980	2440	455	370	370	370	360
1677 & 1980	2440	610	370	370	370	360
1677 & 1980	2440	760	375	400	375	360
1677 & 1980	2440	915	375	400	375	360
1677 & 1980	2440	1220	375	400	375	360

Chipboard & Melamine Shelves			Number of Levels/ Max UDL* (kg) Per Level					
Heights mm	Width mm	Depth mm	3	4	5	6	7	8
2440	1220	455	350	330	330	325	325	300
2440	1220	610	350	330	330	325	325	300
2440	1220	760	350	330	330	325	325	300
2440	1220	915	350	330	330	325	325	300
2440	1220	1220	350	330	330	325	325	300
2440	1525	455	350	330	330	325	325	300
2440	1525	610	350	330	330	325	325	300
2440	1525	760	350	330	330	325	325	300
2440	1525	915	350	330	330	325	325	300
2440	1525	1220	350	330	330	325	325	300
2440	1830	455	350	330	330	325	325	300
2440	1830	610	350	330	330	325	325	300
2440	1830	760	350	330	330	325	325	300
2440	1830	915	350	330	330	325	325	300
2440	1830	1220	350	330	330	325	325	300
2440	2135	455	350	330	330	325	325	300
2440	2135	610	350	330	330	325	325	300
2440	2135	760	350	330	330	325	325	300
2440	2135	915	350	330	330	325	325	300
2440	2135	1220	350	330	330	325	325	300
2440	2440	455	350	330	330	325	325	300
2440	2440	610	350	330	330	325	325	300
2440	2440	760	350	330	330	325	325	300
2440	2440	915	350	330	330	325	325	300
2440	2440	1220	350	330	330	325	325	300

Need some advice? Call our Customer Service Advisers:

**0333 200 5299**

[businesssolutions@bigdug.co.uk](mailto:businesssolutions@bigdug.co.uk)

## BIG400 SHELVING LOAD CAPACITY CHARTS

### STEEL PANEL LEVELS

Steel Panel Levels			Number of Levels/ Max UDL* (kg) Per Level			
Heights mm	Width mm	Depth mm	3	4	5	6
1677 & 1980	1220	455	375	400	375	360
1677 & 1980	1220	610	375	400	375	360
1677 & 1980	1525	455	375	400	375	360
1677 & 1980	1525	610	375	400	375	360
1677 & 1980	1830	455	375	400	375	360
1677 & 1980	1830	610	375	400	375	360
1677 & 1980	2135	455	375	400	375	360
1677 & 1980	2135	610	375	400	375	360
1677 & 1980	2440	455	370	370	370	360
1677 & 1980	2440	610	370	370	370	360

Steel Panel Levels			Number of Levels/ Max UDL* (kg) Per Level					
Heights mm	Width mm	Depth mm	3	4	5	6	7	8
2440	1220	455	350	330	330	325	325	300
2440	1220	610	350	330	330	325	325	300
2440	1525	455	350	330	330	325	325	300
2440	1525	610	350	330	330	325	325	300
2440	1830	455	350	330	330	325	325	300
2440	1830	610	350	330	330	325	325	300
2440	2135	455	350	330	330	325	325	300
2440	2135	610	350	330	330	325	325	300
2440	2440	455	350	330	330	325	325	300
2440	2440	610	350	330	330	325	325	300

Bay Height	1677mm	1980mm	2440mm
Number of Shelf Levels	Clear Height Between Levels	Clear Height Between Levels	Clear Height Between Levels
3	706.1mm	820.4mm 858.3mm	1086.7mm 1049mm
4	439.4mm	2@515.6mm 553.5mm	2@668mm 705.7mm
5	2@287mm 2@325.1mm	3@363.2mm 401.1mm	3@477.5mm 515.2mm
6	2@248.9mm 3@210.8mm	4@287mm 248.7mm	4@363.2mm 400.9mm
7	n/a n/a	n/a n/a	5@287mm 324.7mm
8	n/a n/a	n/a n/a	5@248.9mm 2@210.4mm


Need some advice? Call our Customer Service Advisers:


**0333 200 5299**

[businesssolutions@bigdug.co.uk](mailto:businesssolutions@bigdug.co.uk)

# BiGDUG LOAD CHART


**i Information**  
If in doubt, contact the supplier


 Assess for floor fixing. Tall narrow bays may require this to ensure stability


 We recommend products over 2000mm high are fixed to the wall where possible

 Dispose of packaging materials responsibly


**! Warning**  
Rules for the safe use of shelving:


 Never climb on the structure or stand on the shelving


 Do not lean or support ladders, steps, or other objects against shelving


 Always use safety steps to reach high shelves


 Do not use in damp or wet conditions

 Load heavy items on the lower shelves and lighter items on the higher shelves

 This product is designed for hand loading only

 Ensure that the maximum load carrying capacities are not exceeded

 Please refer to the loading information supplied for details

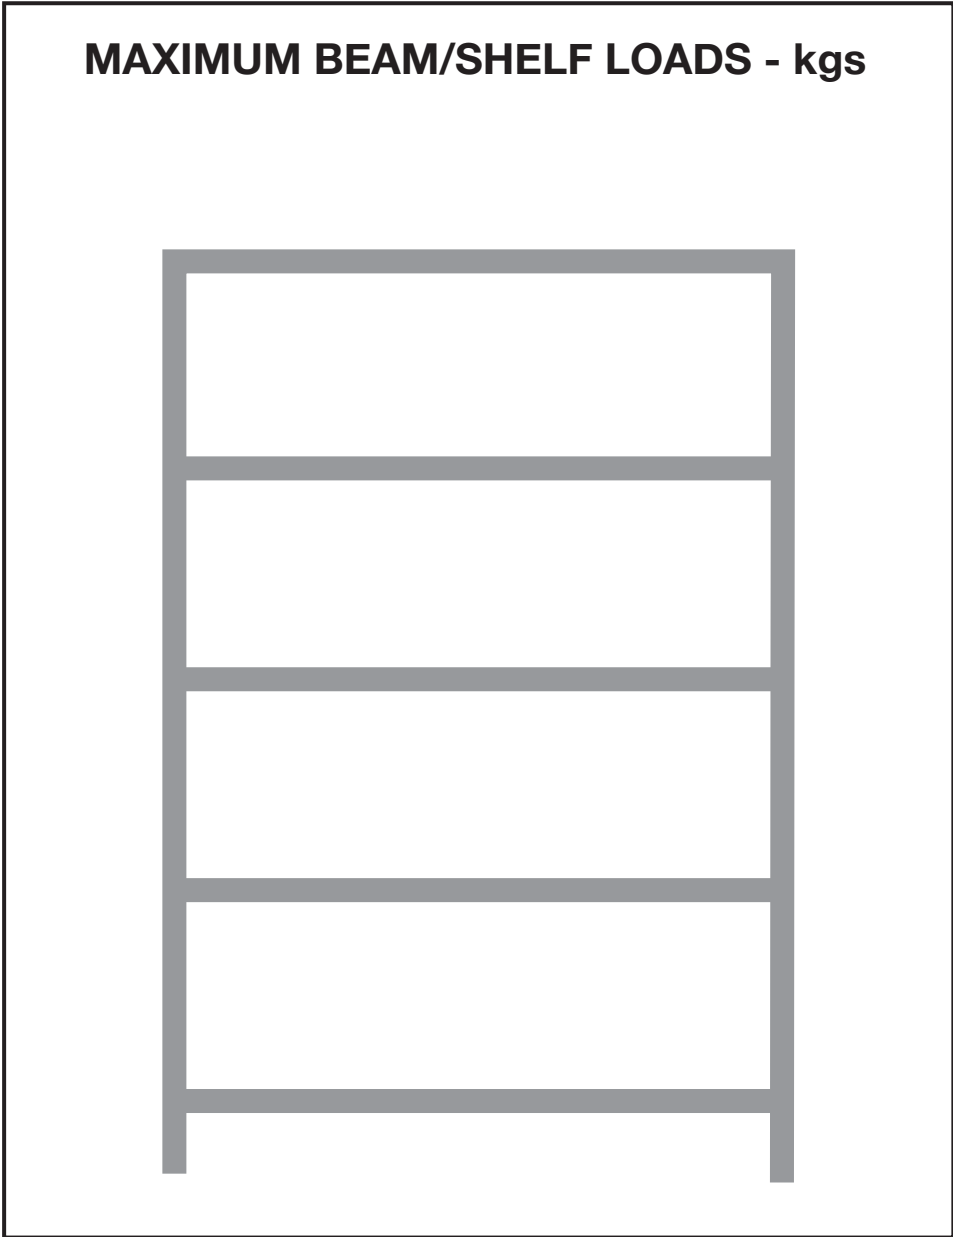

**SUPPLIED:**  
.....

**REF NO:**  
.....

**MAXIMUM BAY LOAD - kgs**

**Always refer to the maximum shelf and bay loads provided by the supplier. This chart should be displayed in a prominent position on or close to the shelving. Shelf positions and load distribution may reduce load capacity - If in doubt, please contact your supplier. Visit [www.bigdug.co.uk](http://www.bigdug.co.uk) and [www.sema.org.uk](http://www.sema.org.uk) for more information on safe practise.**