


## Fork Mounted Extender Jib

Fork Mounted Extending Jibs offer the flexibility to handle varying loads at different load centres. The manually extendable inner beam can be moved to suit your desired load centre and offer a solution to previously inaccessible loads. To fit, drive slowly forwards into the attachment, until the truck forks are fully sleeved, then simply fit the heel pins provided behind the forks to retain the attachment. Ensure the attachment is fully secured before lifting commences.

Fork Mounted Extending Jibs allow transportation of long loads. The two hooks provided allow loads to be slung at greater centres than with conventional fixed jibs. The greater length available allows loads to be picked up from otherwise inaccessible areas. Supplied with two swivel hooks, this jib is Manual Extension.

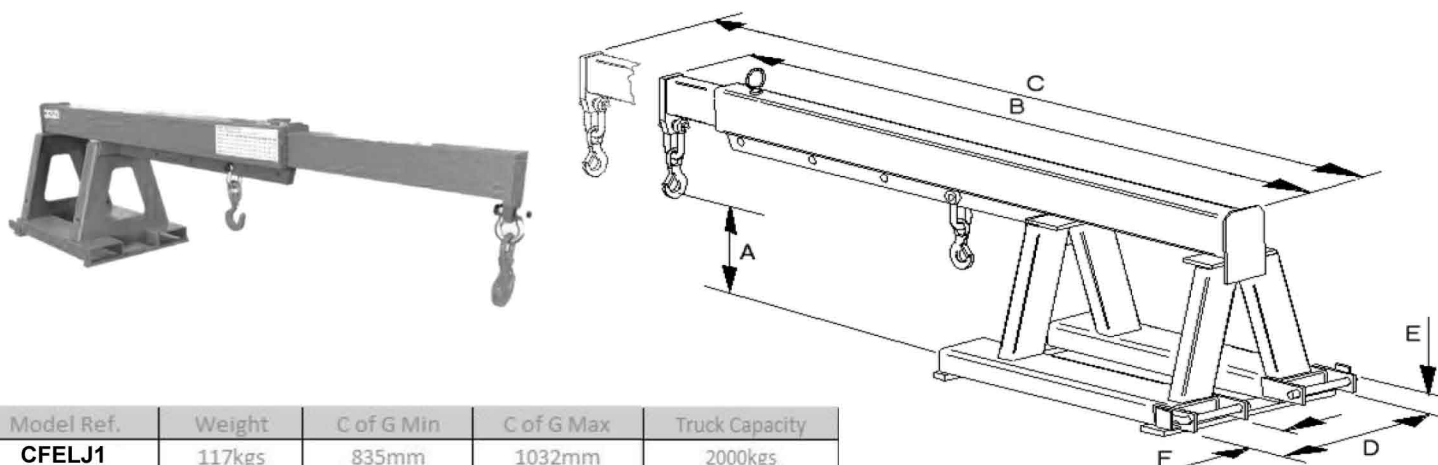

Model Ref.	Weight	C of G Min	C of G Max	Truck Capacity
<b>CFELJ1</b>	117kgs	835mm	1032mm	2000kgs
<b>CFELJ2</b>	122kgs	835mm	1032mm	2500kgs
<b>CFELJ3</b>	210kgs	828mm	1010mm	3000kgs
<b>CFELJ4</b>	225kgs	828mm	1010mm	3500kgs
<b>CFELJ5</b>	236kgs	828mm	1010mm	4000kgs
<b>CFELJ6</b>	246kgs	828mm	1010mm	5000kgs

Model Ref.	Capacity (kgs) @ Load Ctrs (mm)								
	1000	1250	1500	1750	2000	2250	2500	2750	3000
<b>CFELJ1</b>	1100kgs	900kgs	720kgs	580kgs	500kgs	360kgs	330kgs	260kgs	210kgs
<b>CFELJ2</b>	1400kgs	1100kgs	1000kgs	850kgs	750kgs	560kgs	440kgs	320kgs	230kgs
<b>CFELJ3</b>	1450kgs	1200kgs	1100kgs	900kgs	840kgs	670kgs	490kgs	360kgs	270kgs
<b>CFELJ4</b>	1900kgs	1500kgs	1200kgs	1000kgs	900kgs	730kgs	580kgs	450kgs	370kgs
<b>CFELJ5</b>	2000kgs	1600kgs	1300kgs	1100kgs	1000kgs	820kgs	670kgs	540kgs	460kgs
<b>CFELJ6</b>	2700kgs	2200kgs	1850kgs	1400kgs	1100kgs	900kgs	750kgs	620kgs	500kgs

Model Ref.	"A" Hook Height	"B" Closed Length	"C" Open Length	"D" Fork Spread	"F" Fork Width	"E" Fork Thickness
<b>CFELJ1</b>	191mm	2000mm	3000mm	496mm	125mm	50mm
<b>CFELJ2</b>	193mm	2000mm	3000mm	496mm	125mm	50mm
<b>CFELJ3</b>	176mm	2000mm	3000mm	546mm	125mm	50mm
<b>CFELJ4</b>	163mm	2000mm	3000mm	546mm	125mm	50mm
<b>CFELJ5</b>	137mm	2000mm	3000mm	546mm	125mm	50mm
<b>CFELJ6</b>	128mm	2000mm	3000mm	546mm	125mm	50mm